


RECEIVED
JAN 09 1991

NOTICE OF STAKING

100-8106
CR 425-1-10000

Oil Well _____ Gas Well XXX Other _____ Lease No. _____ State 3282
Well Name & No. NBU #124 43-047-31971
Operator Coastal Oil & Gas Corporation
Address P.O. Box 749; Denver, Colorado 80201-0749
Contact Person Randy Bartley/Chuck Mowry Phone (303) 572-1121
Agent Heitzman Drill-Site Services
Address P.O. Box 3579; Casper, Wyoming 82602-3579
Contact Person Dale Heitzman/Bob Anderson Phone (307) 266-4840
If Indian, Allottee or Tribe Name Ute Tribal Surface/State Minerals
Unit Name Natural Buttes Field or Wildcat Name Natural Buttes
Formation Objective(s) Wasatch
Estimated Well Depth 6,450'
County Uintah State Utah
Well Surface Location NW1/4, Section 16, T9S, R21E, S.L.B. & M.
Bottom Hole Location (if known) Same as Above
Surface Owner Ute Tribal Lands: c/o Uintah & Ouray Agency/BIA
Address Fort Duchesne, Utah 84026 Phone (801) 722-2406
Signed  Title Agent Date 01/02/91
Robert M. Anderson


Attachments to the Notice of Staking

1. An acceptable map showing the well location and the access road from the nearest locatable reference point (usually a town or public road).
2. A USGS Topographic map showing the well location, access road, and the intersection of the access road with any unit/lease boundary.

To Be Completed by Operator Prior to On-Site Inspection

1. Location survey with certificate of the surveyor.
2. Wellsite layout plan with a scale of 1" = 50'.



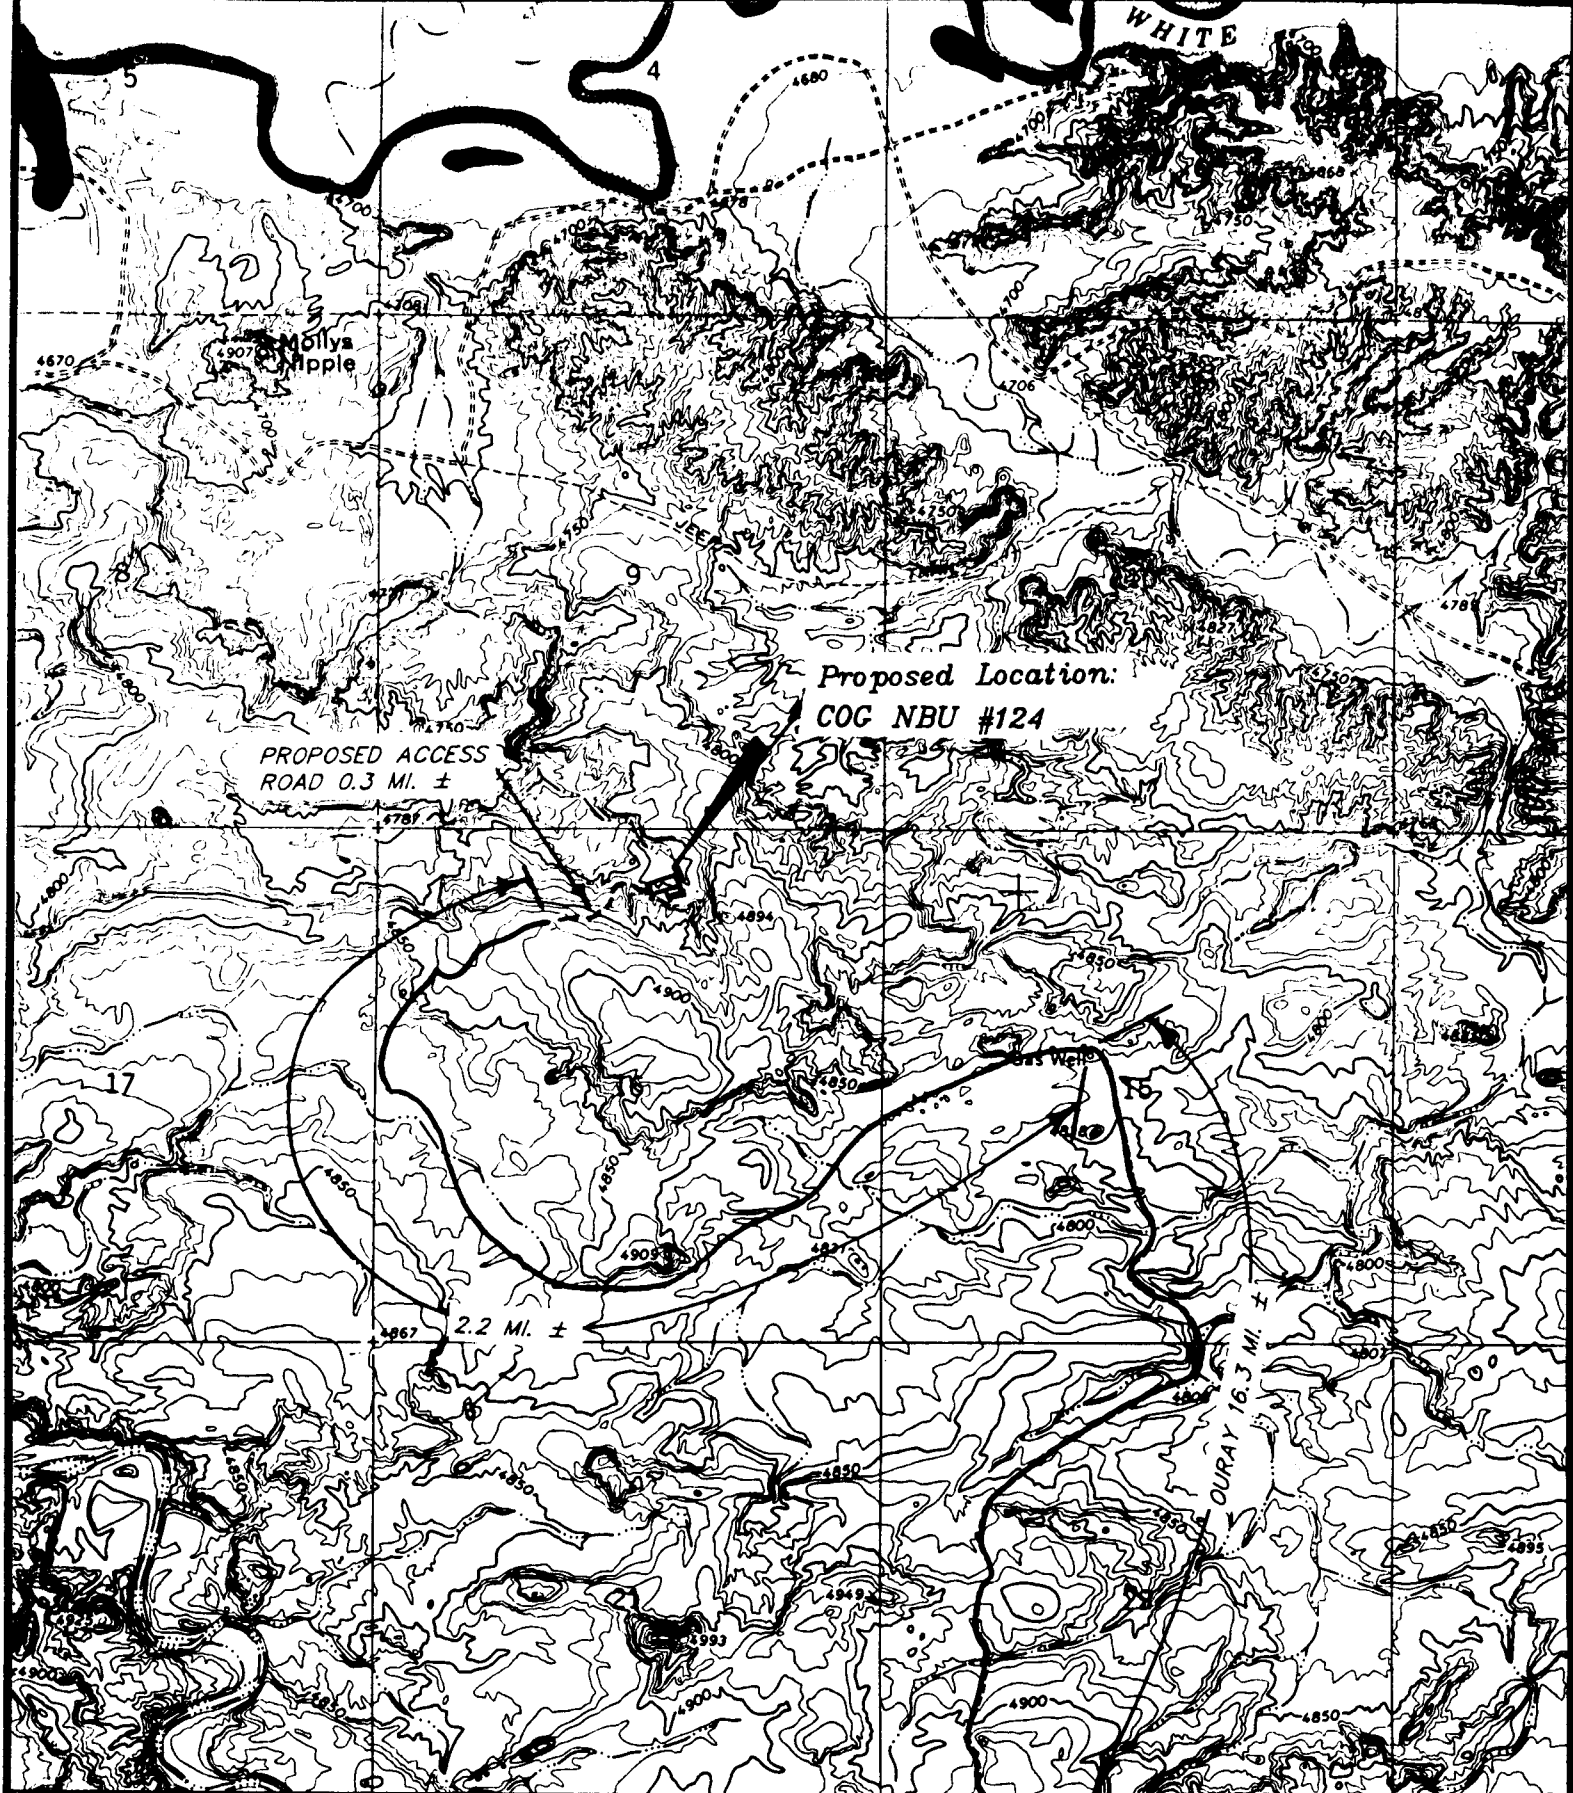


TOPOGRAPHIC
MAP "B"

SCALE: 1" = 2000'
DATE 11-29-90



COASTAL OIL & GAS CORP.

COG NBU #124
SECTION 16, T9S, R21E, S.L.B.&M.

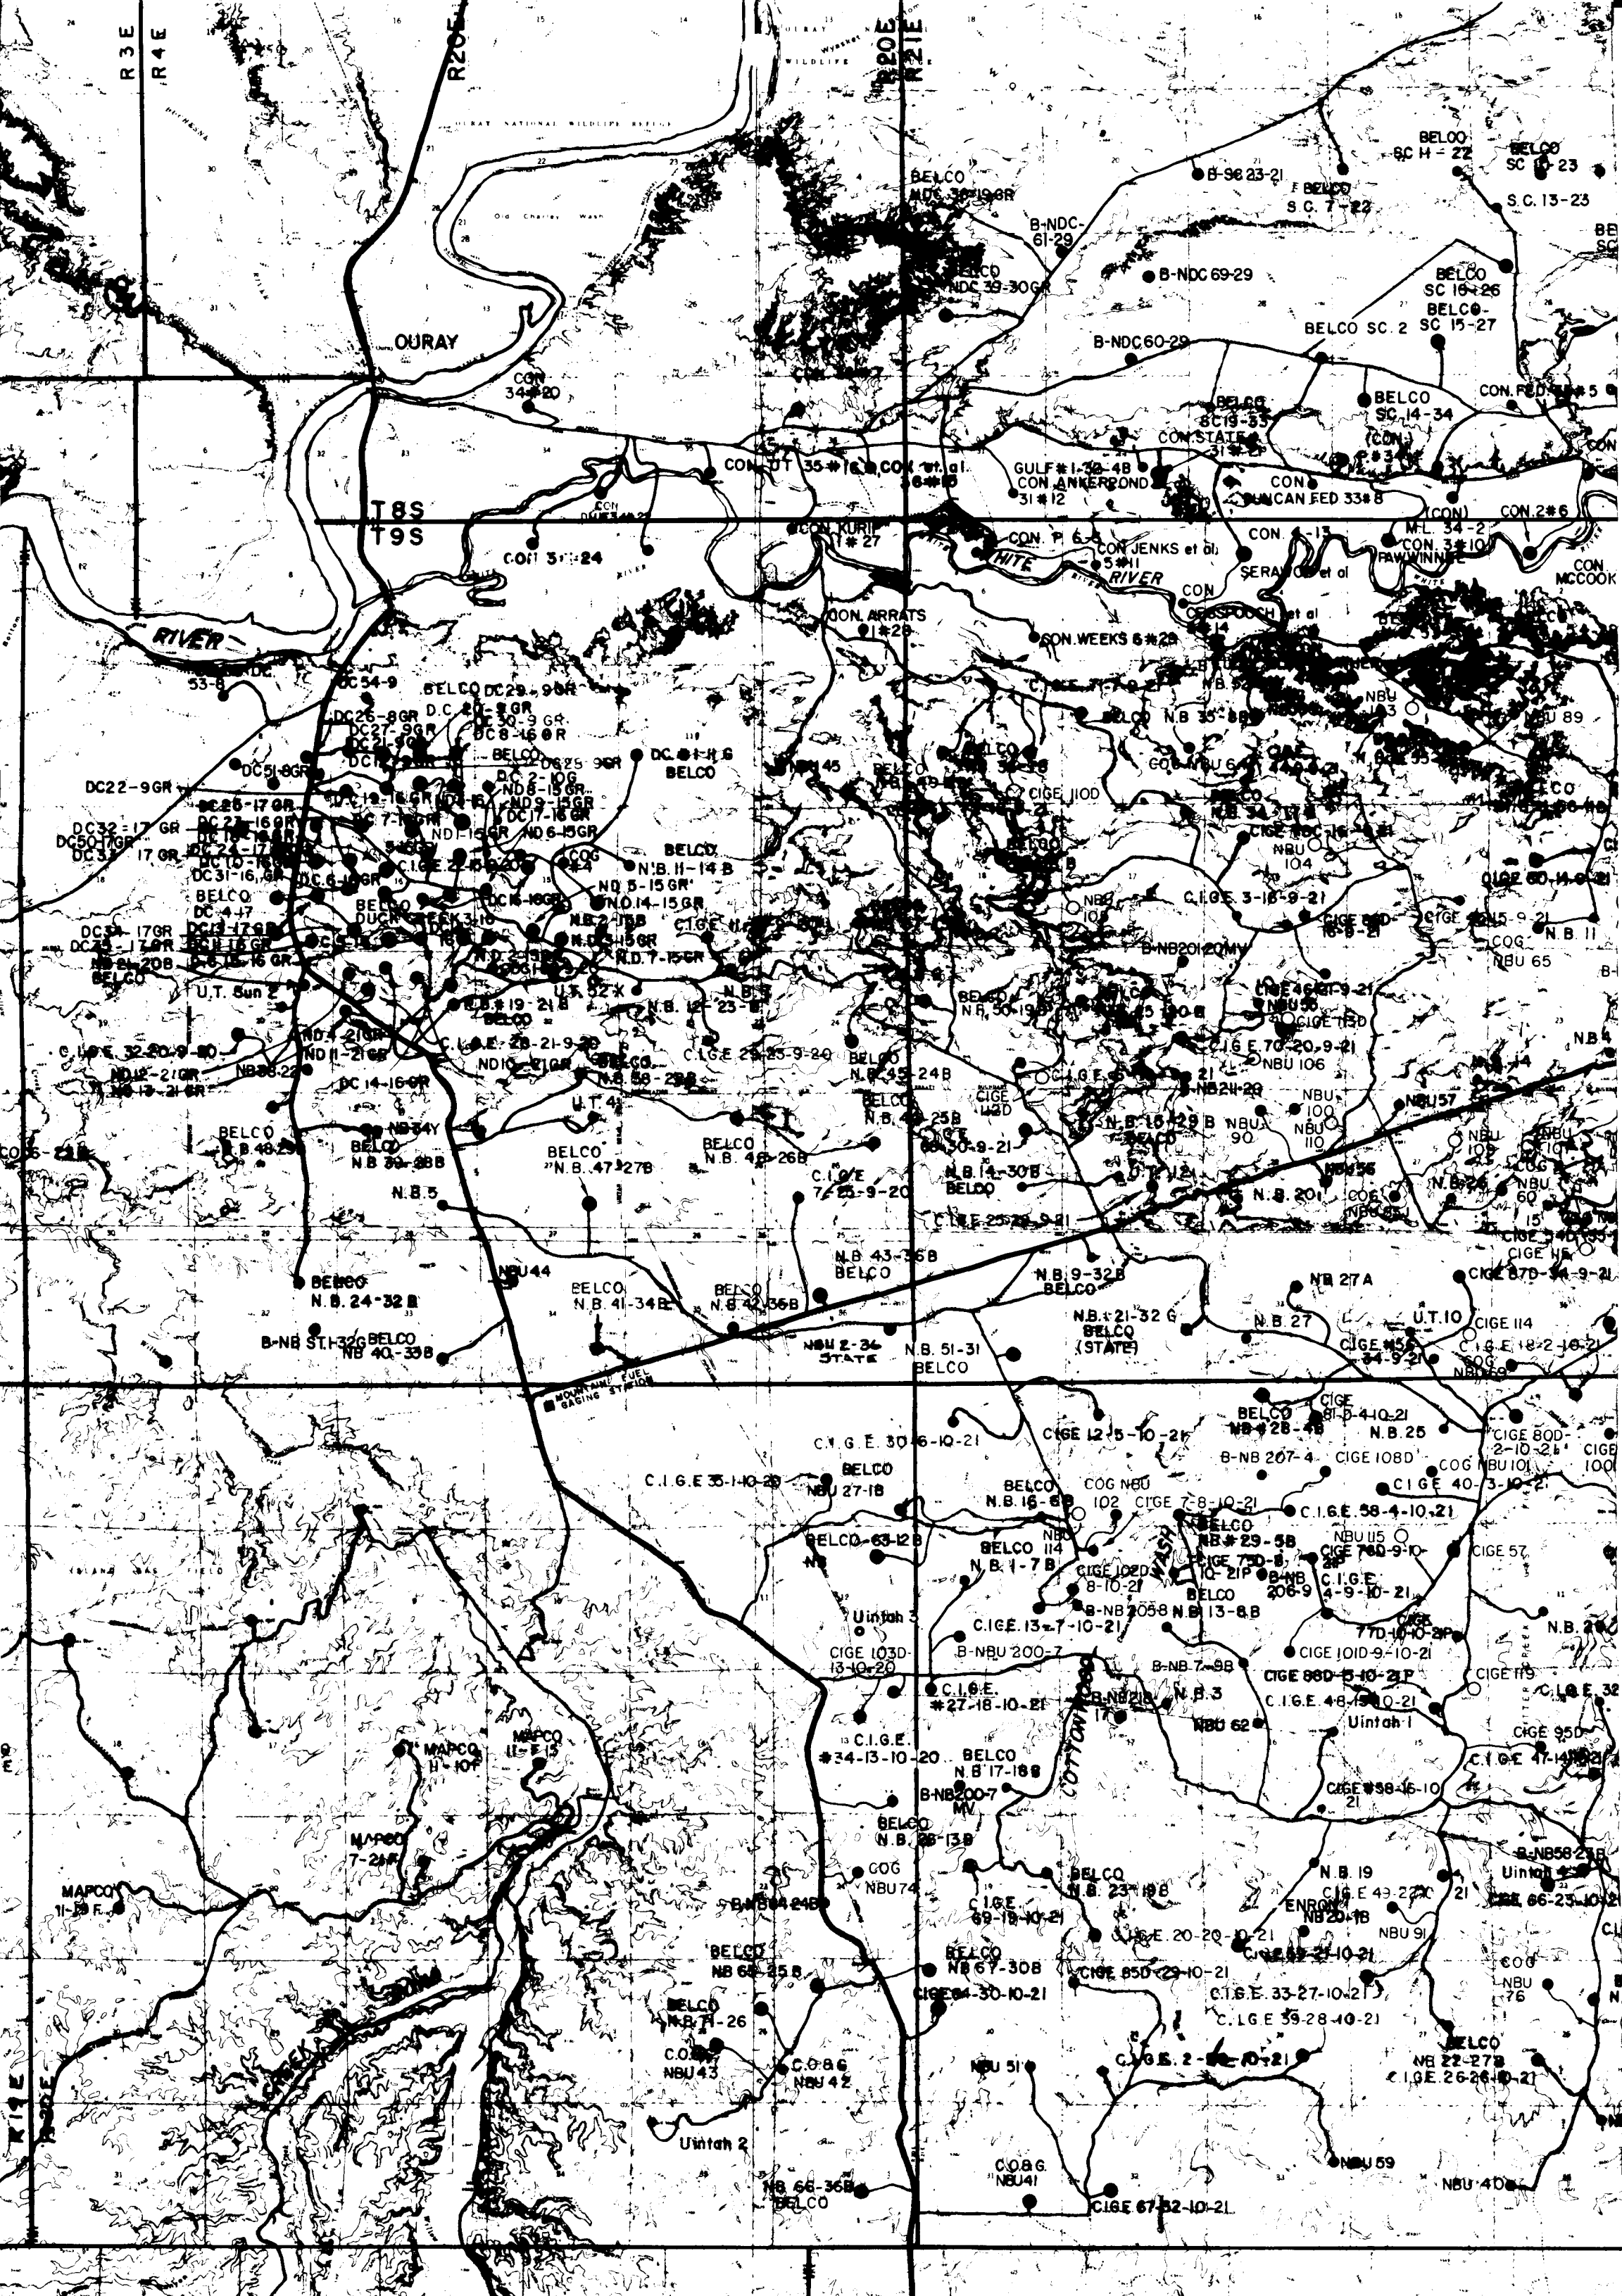



STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

5. Lease Designation and Serial No.

3282

6. If Indian, Allottee or Tribe Name

Not Applicable

7. Unit Agreement Name

Natural Buttes

8. Farm or Lease Name

NBU

9. Well No.

124

10. Field and Pool, or Wildcat

Natural Buttes Lp30

11. Sec., T., R., M., or Blk.
and Survey or Area

Section 16, T9S, R21E

12. County or Parrish 13. State

Uintah

Utah

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. Type of Work

DRILL ☒DEEPEN ☐PLUG BACK ☐

b. Type of Well

Oil Well ☐Gas Well ☒

Other

Single Zone ☒Multiple Zone ☐

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address of Operator

P. O. Box 749, Denver, Colorado 80201-0749

4. Location of Well (Report location clearly and in accordance with any State requirements.*)

At surface

435' FNL, 2295' FEL (NW $\frac{1}{4}$ NE $\frac{1}{4}$) 16-9S-21E

At proposed prod. zone

Same As Above

14. Distance in miles and direction from nearest town or post office*

Approximately Six (6) Miles Southeast of Ouray, Utah

15. Distance from proposed*

location to nearest property or lease line, ft.
(Also to nearest drlg. line, if any)

435'

16. No. of acres in lease

280

17. No. of acres assigned to this well

80

18. Distance from proposed location* to nearest well, drilling, completed, or applied for, on this lease, ft.

1506.65'

19. Proposed depth

6450' WSTC

20. Rotary or cable tools

Rotary

21. Elevations (Show whether DF, RT, GR, etc.)

4796' GR

22. Approx. date work will start*

April 15, 1991

23.

PROPOSED CASING AND CEMENTING PROGRAM

Size of Hole	Size of Casing	Weight per Foot	Setting Depth	Quantity of Cement
12-1/4"	8-5/8" J-55	24.0#	0-250'	Circulate to Surface
7-7/8"	5-1/2" K-55	17.0#	0-T.D.	Circulate to Surface

PLEASE REFER TO ATTACHED DRILLING PROGNOSIS.

RECEIVED
MAR 06 1991DIVISION OF
OIL, GAS & MINING

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

Signed

Robert M. Anderson

Title Authorized Agent

APPROVED BY THE STATE 1991

(This space for Federal or State office use)

API

43-047-31971

Permit No.

Approval Date

OF UTAH DIVISION OF
OIL, GAS, AND MINING

DATE:

3-11-91

BY:

WELL SPACING: 615-2-3

Approved by


Title

Conditions of approval, if any:

T9S, R21E, S.L.B.&M.

COASTAL OIL & GAS CORP.

Well location, COG NBU #124, located as shown in the NW 1/4 NE 1/4 of Section 16, T9S, R21E, S.L.B.&M. Uintah County, Utah.

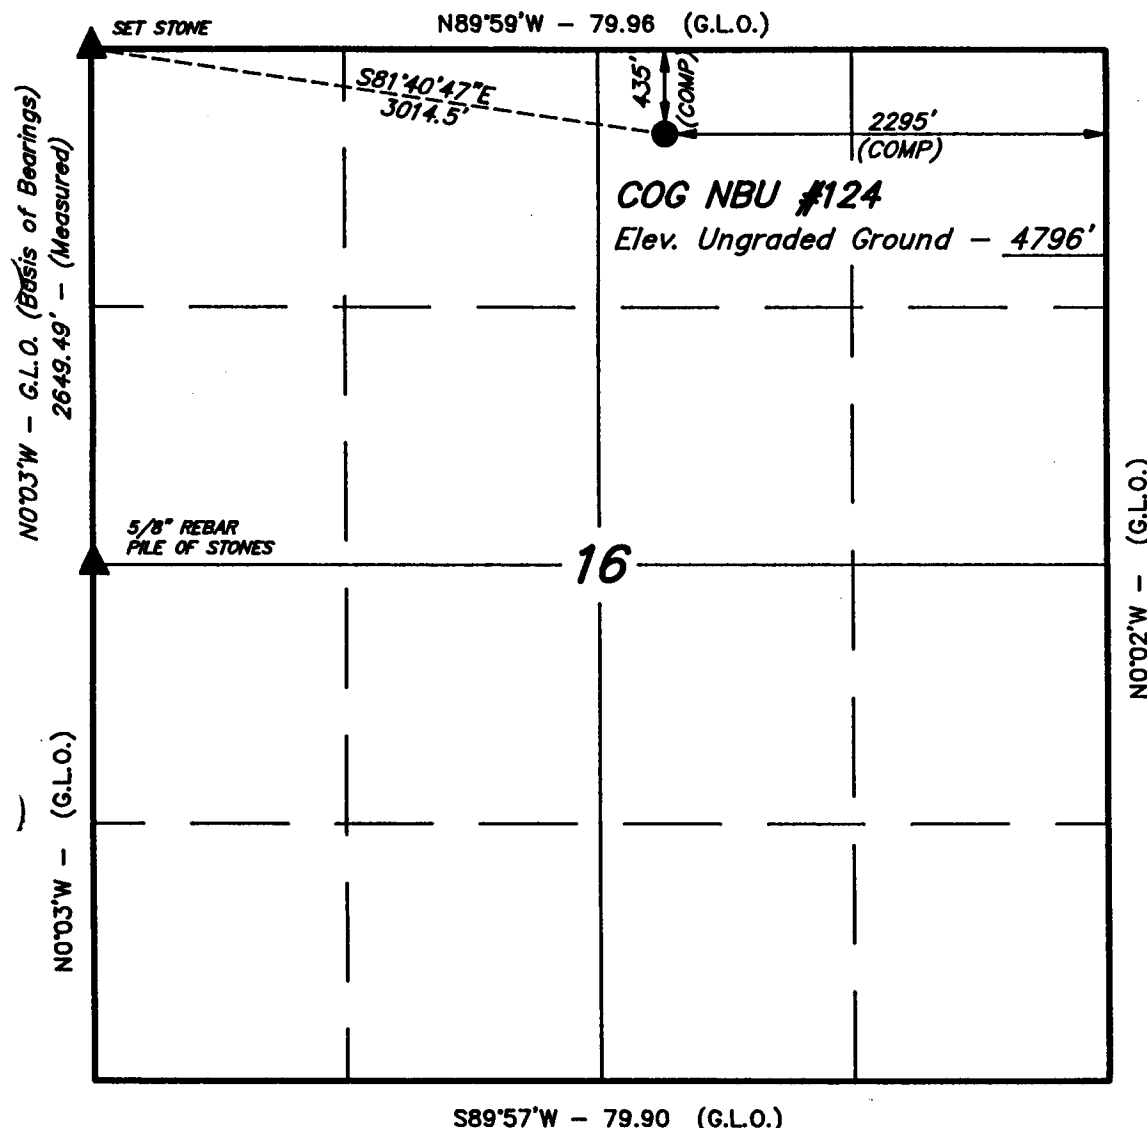

BASIS OF ELEVATION

SPOT ELEVATION AT THE SE CORNER OF SECTION 17, T9S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4867 FEET.



CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Robert L. Kay
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 5709
 STATE OF UTAH

UINTAH ENGINEERING & LAND SURVEYING
 P. O. BOX 1758 - 85 SOUTH - 200 EAST
 VERNAL, UTAH - 84078

SCALE 1" = 1000'	DATE 1-22-91
PARTY G.S. J.H. R.E.H.	REFERENCES G.L.O. PLAT
WEATHER COLD	FILE COASTAL OIL & GAS CORP.

▲ = SECTION CORNERS LOCATED.

COASTAL OIL & GAS CORPORATION
State Lease #3282, NBU #124
NW $\frac{1}{4}$ NE $\frac{1}{4}$, Section 16, T9S, R21E
Uintah County, Utah

Drilling Prognosis

1. Estimated Tops of Important Geologic Markers:

Uinta	Surface	Wasatch	5195'
Green River	1421'	Total Depth	6450'

2. Estimated Depths of Anticipated Water, Oil, Gas or Mineral Formations:

Wasatch	5195'	Gas (Primary Objective)
---------	-------	-------------------------

If any shallow water zones are encountered, they will be adequately protected and reported; none anticipated. All potentially productive hydrocarbon zones will be cemented off.

3. Pressure Control Equipment: (Schematic Attached)

A. Type: 11" Double Gate Hydraulic.

The Blow-Out Preventer will be equipped as follows:

1. One (1) blind ram (above).
2. One (1) pipe ram (below).
3. Kill line (2-inch minimum).
4. One (1) kill line valve (2-inch minimum).
5. One (1) choke line valve.
6. Two (2) adjustable chokes.
7. Upper kelly cock valve with handle available.
8. Safety valve & subs to fit all drill strings in use.
9. 2-inch (minimum) choke line.
10. Pressure gauge on choke manifold.

B. Pressure Rating: 2,000 psi

C. Testing Procedure:

At a minimum, the BOP, choke manifold, and related equipment will be pressure tested to the approved working pressure of the BOP stack (if isolated from the surface casing by a test plug) or to 70% of the internal yield strength of the surface casing (if the BOP is not isolated from the casing by a test plug). Pressure will be maintained for a period of at least ten (10) minutes or until the requirements of the test are met, whichever is longer.

3. Pressure Control Equipment:

C. Testing Procedure: Continued

At a minimum, the above pressure test will be performed:

1. When the BOP is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition to the above, the pipe and blind rams will be activated each trip, but not more than once each day.

All BOP drills and tests will be recorded in the IADC driller's log.

D. Special Drilling Operations:

In addition to the equipment already specified in Items A through C, above, the following equipment will be in place and operational during air/gas drilling:

1. Properly lubricated and maintained rotating head.
2. Spark arresters on engines or water cooled exhaust.
3. Blooie line discharge 100 feet from well bore and securely anchored.
4. Straight run on blooie line.
5. Deduster equipment (not required for aerated water system).
6. All cuttings and circulating medium(s) shall be directed into a reserve or blooie pit.
7. Float valve above bit.
8. Automatic igniter or continuous pilot light on the blooie line (not required for aerated water system).
9. Compressors located in the opposite direction from the blooie line and at a minimum of 100 feet from the well bore.
10. Mud circulating equipment, water, and mud materials (does not have to be pre-mixed) sufficient to maintain the capacity of the hole and circulating tanks or pits.

4. The Proposed Casing and Cementing Program: (All New)

A. Casing Program

<u>Hole Size</u>	<u>Casing Size</u>	<u>Wt./Ft.</u>	<u>Grade</u>	<u>Joint</u>	<u>Depth Set</u>
12-1/4"	8-5/8"	24.0#	K-55	ST&C	0- 250'
7-7/8"	5-1/2"	17.0#	K-55	LT&C	0-6450'

Casing string(s) will be pressure tested to 0.22 psi per foot, or 1500 psi (not to exceed 70% of the internal yield strength of the casing), whichever is greater, after cementing and prior to drilling out from under the casing shoe.

B. Cementing Program

Surface Casing : Cement with approximately 180 sx Class "G" cement + additives, circulated to surface with 100% excess.

Production Casing : Lead with approximately 350 sx Halliburton Silica "Lite" cement with 4% Gel, 4% CaCl₂, 0.3 % Halad-413 and 2.0#/sx Granulite TR; tail with approximately 195 sx Class "G" cement + additives. Cement will be circulated back to surface with 30% excess.

Actual cement volumes to be required will be determined from the caliper log.

All waiting on cement (WOC) times will be adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.

5. Mud Program: (Visual Monitoring)

<u>Interval</u>	<u>Type</u>	<u>Weight</u>	<u>Viscosity</u>	<u>Fluid Loss</u>
0-6450'	Aerated Water	-----	-----	-----

Sufficient quantities of mud materials will be maintained or readily accessible for the purpose of assuring well control during the course of drilling operations.

6. Evaluation Program:

Logs : DIL-Caliper : 6450' - Surface
FDC-CNL : 6450' - 1500'

DST's : None anticipated.

Cores : None anticipated.

The proposed evaluation program may change at the discretion of the wellsite geologist, with prior approval from the Authorized Officer, Bureau of Land Management.

Stimulation : No stimulation or frac treatment has been formulated for this test at this time. The drill site, as approved, will be of sufficient size to accommodate all completion activities.

7. Abnormal Conditions:



No abnormal temperatures or pressures are anticipated. No H₂S has been encountered in or known to exist from previous wells drilled to similar depths in the general area. Maximum anticipated bottom hole pressure equals approximately 2,999 psi (calculated at 0.465 psi/foot) and maximum anticipated surface pressure equals approximately 1,580 psi (bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. Anticipated Starting Dates and Notification of Operations:

A. Drilling Activity

Anticipated Commencement Date : May 1, 1991
Drilling Days : Approximately 10 Days
Completion Days : Approximately 7 days

BOP STACK

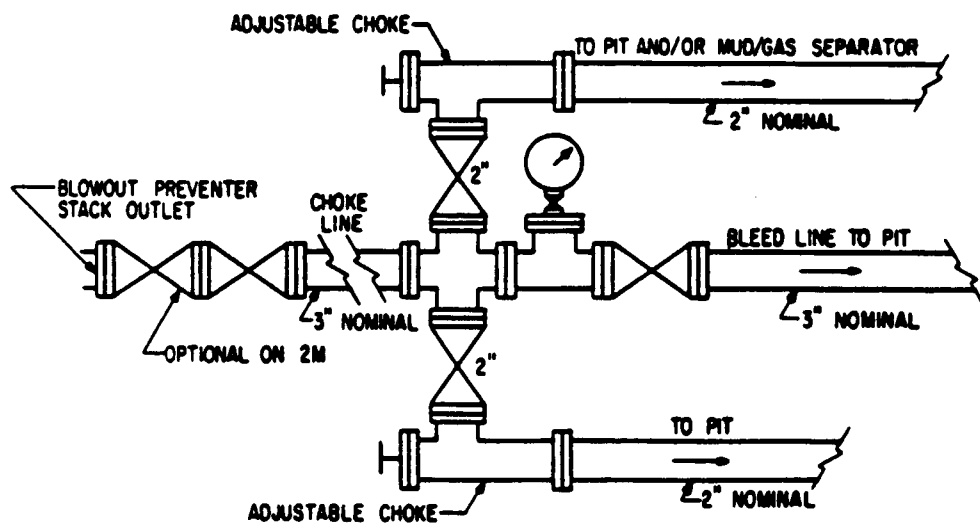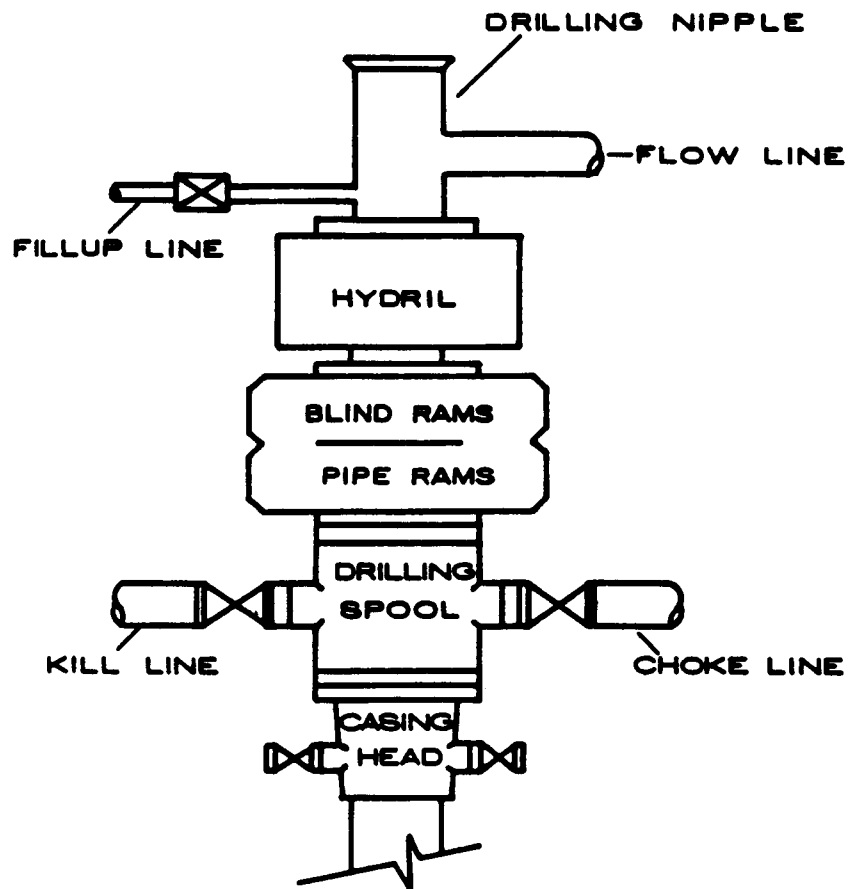

COASTAL OIL & GAS CORPORATION
State Lease #3282, NBU #124
NW $\frac{1}{4}$ NE $\frac{1}{4}$, Section 16, T9S, R21E
Uintah County, Utah

Multi-Point Surface Use and Operations Plan

1. Existing Roads: Refer to Maps "A" & "B" (shown in ORANGE)
 - A. The proposed well site is staked and four 200-foot reference stakes are present.
 - B. To reach the location from the town of Vernal, Utah; proceed generally southwest approximately 14.0 miles on U.S. Highway 40 (a paved U.S. highway), thence generally south approximately 17.0 miles on Utah Highway 88 (a paved state highway) to the town of Ouray, thence generally south approximately 6.9 miles on the Seep Ridge Road (an existing, upgraded Uintah County road), thence generally east approximately 5.0 miles on an existing, upgraded oilfield road (crowned & ditched with a gravel surface), thence generally northeast approximately 1.7 miles on the Mountain Fuel Pipeline Road (an existing, upgraded oilfield road - crowned & ditched with a gravel surface), thence generally north/northeast approximately 2.7 miles on an existing, upgraded oilfield road (crowned & ditched with a gravel surface) to an abandoned well location, thence generally west and north approximately 2.2 miles on an existing, upgraded oilfield road (crowned & ditched with a gravel surface) to the existing CIGE #78C producing gas well location, thence generally east/northeast approximately 0.3 miles to the proposed NBU #124 well location.
 - C. Access roads - refer to Maps "A" and "B".
 - D. Access roads within a one (1) mile radius - refer to Map "B".
 - E. The existing gravel roads will be maintained in the same or better condition as existed prior to the commencement of operations and said maintenance will continue until final abandonment and reclamation of the NBU #124 well location.
2. Planned Access Roads: Refer to Map "B" (Shown in GREEN)

Approximately 0.3 miles of new road construction will be required for access to the proposed NBU #124 well location.

 - A. Width - maximum 30-foot overall right-of-way with an 18-foot road running surface, crowned & ditched.

2. Planned Access Roads: Continued

- B. Construction standard - the access road will be constructed in accordance with Bureau of Land Management Rooding Guidelines established for oil and gas exploration and development activities as referenced in the BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development, Third Edition.

The road will be constructed to meet the standards of the anticipated traffic flow and all-weather requirements. Construction will include ditching, draining, graveling, crowning, and capping the roadbed as necessary to provide a well constructed and safe road.

Prior to construction/upgrading, the roadway shall be cleared of any snow cover and allowed to dry completely.

Traveling off of the thirty (30) foot right-of-way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or the accumulation of debris in the drainage crossing nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at a frequent intervals by means of cutouts.

Upgrading shall not be allowed during muddy conditions.

Should mud holes develop, they shall be filled in and detours around them avoided.

- C. Maximum grade - 6%.
D. Turnouts - turnouts will be constructed along the access route as necessary or required to allow for the safe passage of traffic. None anticipated at this time.
E. Drainage design - the access road will be crowned, ditched, and water turnouts installed as necessary to provide for proper drainage along the access road route.
F. Culverts, cuts and fills - no culverts will be required. There are no major cuts and/or fills on/along the proposed access road route.

2. Planned Access Roads: Continued

- G. Surface materials - any construction materials which may be required for surfacing of the access road will be purchased from a local contractor having a permitted source of materials in the area, if required by the Authorized Officer, Bureau of Indian Affairs. None anticipated at this time.
- H. Gates, cattleguards or fence cuts - none required.
- I. Road maintenance - during both the drilling and production phase of operations, the road surface and shoulders will be kept in a safe and useable condition and will be maintained in accordance with the original construction standards. All drainage ditches and culverts will be kept clear and free-flowing, and will also be maintained in accordance with the original construction standards. The access road right-of-way will be kept free of trash during operations.
- J. The proposed access road has been centerline flagged.

3. Location of Existing Wells Within a One-Mile Radius:

Please Refer to Map "C"

- A. Water wells - none known.
- B. Abandoned wells - SE $\frac{1}{4}$ NW $\frac{1}{4}$, Section 15, T9S, R21E.
- C. Temporarily abandoned wells - none known.
- D. Disposal wells - none known.
- E. Drilling wells - none known.
- F. Producing wells - NE $\frac{1}{4}$ SE $\frac{1}{4}$, Section 8, T9S, R21E.
SE $\frac{1}{4}$ NW $\frac{1}{4}$, Section 9, T9S, R21E.
NW $\frac{1}{4}$ NE $\frac{1}{4}$, Section 9, T9S, R21E.
SE $\frac{1}{4}$ SE $\frac{1}{4}$, Section 9, T9S, R21E.
NE $\frac{1}{4}$ NW $\frac{1}{4}$, Section 16, T9S, R21E.
SW $\frac{1}{4}$ SE $\frac{1}{4}$, Section 16, T9S, R21E.
SW $\frac{1}{4}$ SW $\frac{1}{4}$, Section 16, T9S, R21E.
NE $\frac{1}{4}$ NE $\frac{1}{4}$, Section 17, T9S, R21E.
- G. Shut-in wells - none known.
- H. Injection wells - none known.
- I. Monitoring wells - none known.

4. Location of Existing and/or Proposed Facilities Owned by Coastal Oil & Gas Corporation Within a 1-Mile Radius:

A. Existing

- 1. Tank batteries - NE $\frac{1}{4}$ SE $\frac{1}{4}$, Section 8, T9S, R21E.
SE $\frac{1}{4}$ NW $\frac{1}{4}$, Section 9, T9S, R21E.

4. Location of Existing and/or Proposed Facilities Owned by Coastal Oil & Gas Corporation Within a 1-Mile Radius: Cont.

A. Existing - Continued

1. Tank batteries - NW $\frac{1}{4}$ NE $\frac{1}{4}$, Section 9, T9S, R21E.
SE $\frac{1}{4}$ SE $\frac{1}{4}$, Section 9, T9S, R21E.
NE $\frac{1}{4}$ NW $\frac{1}{4}$, Section 16, T9S, R21E.
SW $\frac{1}{4}$ SE $\frac{1}{4}$, Section 16, T9S, R21E.
SW $\frac{1}{4}$ SW $\frac{1}{4}$, Section 16, T9S, R21E.
NE $\frac{1}{4}$ NE $\frac{1}{4}$, Section 17, T9S, R21E.
2. Production facilities - same as Item #4A1, above.
3. Oil gathering lines - none.
4. Gas gathering lines - same as Item #4A1, above.

B. New Facilities Contemplated

1. All production facilities will be located on the disturbed portion of the well pad and at a minimum of twenty-five (25) feet from the toe of the back-slope or top of the fill slope.
2. The production facilities (consisting primarily of a christmas tree at the well head, dehydration unit, and emergency pit) will require an area approximately 300' X 135'. A diagram showing the proposed production facility layout will be submitted to the Authorized Officer via "Sundry Notice" (Form 3160-5) for approval of subsequent installation operations.
3. Production facilities will be accommodated on the existing well pad. Construction materials required for installation of the production facilities will be obtained from the site; any additional materials required will be purchased from a local supplier having a permitted (private) source of materials within the area.

A dike will be constructed completely around those production facilities which contain fluids (i.e. production tanks, produced water tanks and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

4. All permanent (on-site for six months or longer) above-the-ground structures constructed or installed including pumping units) will be painted a flat, non-reflective, earthtone color.

4. Location of Existing and/or Proposed Facilities Owned by Coastal Oil & Gas Corporation Within a 1-Mile Radius: Cont.

B. New Facilities Contemplated - Continued

4. This "earthtone" color will match one of the standard environmental colors, as determined by the Five (5) State Rocky Mountain Interagency Committee.

All production facilities will be painted within six (6) months of installation. Facilities required to comply with Occupational Health and Safety Act Rules and Regulations will be excluded from this painting requirement.

The required paint color is Carlsbad Canyon, Munsell standard color number 2.5Y 6/2.

- C. The production (emergency) pit will be fenced with woven wire mesh topped with one (1) strand of barbed wire held in place with metal side posts and wooden corner "H" braces in order to protect livestock and wildlife. Please refer to Item #9E (page #'s 8 & 9) for additional information on the fencing specifications.
- D. During drilling and subsequent operations, all equipment and vehicles will be confined to the access road right-of-way and any additional areas as specified in the approved Application for Permit to Drill.
- E. Reclamation of disturbed areas no longer needed for operations will be accomplished by grading, leveling and seeding as recommended by the Bureau of Indian Affairs.

5. Location and Type of Water Supply:

- A. Fresh water for drilling will be obtained from an existing water well and reservoir: Uintah #1, owned by Target Trucking, Inc. and located in the SE $\frac{1}{4}$ SE $\frac{1}{4}$ NE $\frac{1}{4}$ of Section 16, Township 10 South, Range 21 East, Uintah County, Utah; permit #49-991 (A57530).
- B. Water will be transported over existing roads via tank truck from the point of diversion to the proposed NBU #124 well location. No new construction will be required on/along the proposed water haul route.

5. Location and Type of Water Supply: Continued

- B. Access roads which cross off-lease Tribal lands on/along the proposed water haul route will be authorized under a separate Right-of-Way Grant/Special Use Permit to be obtained from the Uintah and Ouray Ute Indian Tribes and/or the Bureau of Indian Affairs prior to commencement of operations, if required.
- C. No water well will be drilled on this location.

6. Source of Construction Materials:

- A. Construction materials needed for surfacing of the well pad will be obtained from a local contractor having a permitted (private) source of materials in the area. Refer to Item #2G (page #3) regarding any construction materials which may be required on the access road.
- B. No construction materials will be taken from Federal and/or Indian lands without prior approval from the appropriate Surface Management Agency.
- C. If production is established, any additional construction materials needed for surfacing the access road and installation of production facilities will be purchased from a local supplier having a permitted (private) source of materials in the area.
- D. No new access roads for construction materials will be required.

7. Methods of Handling Waste Materials:

- A. Cuttings - the cuttings will be deposited in the reserve/blooiie pit.
- B. Drilling fluids - including salts and chemicals will be contained in the reserve/blooiie pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within ninety (90) days after termination of drilling and completion activities.

In the event adverse weather conditions prevent removal of the fluids from the reserve pit within this time period, an extension may be granted by the Authorized Officer upon receipt of a written request from Coastal Oil & Gas Corporation.

The reserve pit will be constructed so as not to leak, break, or allow discharge.

7. Methods of Handling Waste Materials: Continued

- C. Produced fluids - liquid hydrocarbons produced during completion operations will be placed in test tanks on the location. Produced waste water will be confined to a lined pit (reserve pit) or storage tank for a period not to exceed ninety (90) days after initial production.

During the ninety (90) day period, in accordance with NTL-2B, an application for approval of a permanent disposal method and location, along with the required water analysis, shall be submitted for the Authorized Officer's approval. Failure to file an application within the time frame allowed will be considered an incidence of noncompliance.

Any spills of oil, gas, salt water or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

- D. Sewage - self-contained, chemical toilets will be provided by Rocket Sanitation for human waste disposal. Upon completion of operations, or as needed, the toilet holding tanks will be pumped and the contents thereof disposed of in the nearest, approved, sewage disposal facility.
- E. Garbage and other waste material - garbage, trash and other waste materials will be collected in a portable, self-contained and fully-enclosed trash cage during drilling and completion operations. Upon completion of operations (or as needed) the accumulated trash will be disposed of at an authorized sanitary landfill. No trash will be burned on location or placed in the reserve pit.
- F. Immediately after removal of the drilling rig, all debris and other waste materials not contained in the trash cage will be cleaned up and removed from the well location. No adverse materials will be left on the location. Any open pits will be fenced during the drilling operation and the fencing will be maintained until such time as the pits are backfilled.
- G. The reserve and/or production pit will be constructed on the existing location and will not be located in natural drainages where a flood hazard exists or surface runoff will destroy or damage the pit walls. All pits will be constructed so as not to leak, break, or allow the discharge of liquids therefrom.

8. Ancillary Facilities:

None anticipated.

9. Wellsite Layout:

- A. Figure #1 shows the drill site layout as staked. Cross sections have been drafted to visualize the planned cuts and fills across the location. On the average, a minimum of twelve (12) inches of topsoil will be stripped from the location (including areas of cut, fill, and/or subsoil storage) and stockpiled for future reclamation of the well site. Refer to Figure #1 for the location of the topsoil and subsoil stockpiles.
- B. Figure #1 is a diagram showing the rig layout. No permanent living facilities are planned. There will be one (1) trailer on location during drilling operations for the toolpusher.
- C. A diagram showing the proposed production facility layout will be submitted to the Authorized Officer via Sundry Notice (Form 3160-5) for approval of subsequent operations. Refer to Item #4B2 (page #4) for additional information in this regard.
- D. The reserve pit will be lined with either native clay, commercial bentonite, or plastic sufficient to prevent seepage (12 mil). If a plastic-nylon reinforced liner is used, it will be torn and perforated after the pit dries and before backfilling of the reserve pit.

A flare/blooiie pit will be constructed adjacent to the location, southwest of and separate from the reserve pit, and at a minimum of thirty (30) feet from the reserve pit fence and one hundred (100) feet from the rig substructure (Refer to Figure #1 for the location of the flare/blooiie pit).

- E. Prior to the commencement of drilling operations, the reserve pit will be fenced "sheep tight" on three (3) sides according to the following minimum standards:
 - 1. Thirty (30) inch net wire will be used with at least one (1) strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

9. Wellsite Layout: Continued

- E. Prior to the commencement of drilling operations, the reserve pit will be fenced "sheep tight" on three (3) sides according to the following minimum standards:
2. The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
 3. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
 4. Standard steel, wood, or pipe posts shall be used between the corner braces. The maximum distance between any two (2) posts shall be no greater than sixteen (16) feet.
 5. All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The fourth side of the reserve pit will be fenced immediately upon removal of the drilling rig and the fencing will be maintained until the pit is backfilled.

- F. Any hydrocarbons on the pit will be removed from the pit as soon as possible after drilling operations are completed.

10. Plans for Reclamation of the Surface:

The Ute Tribe will be contacted prior to commencement of any reclamation operations.

A. Production

1. Immediately upon well completion, the well location and surrounding area(s) will be cleared of all debris, materials, trash and junk not required for production.
2. Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with 43 CFR 3162.7-1.

10. Plans for Reclamation of the Surface:

A. Production - Continued

3. If a plastic or nylon reinforced pit liner is used, it shall be torn and perforated before backfilling of the reserve pit.
4. Before any dirt work to restore the location takes place, the reserve pit will be completely dry and all cans, barrels, pipe, etc. will be removed therefrom. Other waste and spoil materials will be disposed of immediately upon completion of drilling and workover activities.
5. The reserve pit and that portion of the location and access road not needed for production facilities/operations will be reclaimed within ninety (90) days from the date of well completion, weather permitting.
6. For production, the fill slopes will be reduced from a 1.5:1 slope to a 4:1 slope and the cut slopes will be reduced from a 1.5:1 slope to a 4:1 slope by pushing the fill material back up into the cut.
7. Upon completion of backfilling, leveling and re-contouring, the stockpiled topsoil will be evenly spread over the reclaimed area(s).

Prior to reseeding, all disturbed surfaces (including the access road and location) will be scarified and left with a rough surface. No depressions will be left that would trap water and form ponds. All disturbed surfaces (including the access road and well pad areas) will be reseeded with a seed mixture to be recommended by the Bureau of Indian Affairs.

Seed will be drilled on the contour to an approximate depth of one-half (1/2) inch. All seeding will be conducted after September 15 and prior to ground frost. If the seeding is unsuccessful, Coastal Oil & Gas Corporation may be required to make subsequent seedings.

10. Plans for Reclamation of the Surface: Continued

B. Dry Hole/Abandoned Location

1. On lands administered by the Bureau of Indian Affairs, abandoned well sites, roads, or other disturbed areas will be restored to near their original condition. This procedure will include:
 - (a) re-establishing irrigation systems where applicable,
 - (b) re-establishing soil conditions in irrigated fields in such a way as to ensure cultivation and harvesting of crops and,
 - (c) ensuring revegetation of the disturbed areas to the specifications of the Ute Indian Tribe or the BIA at the time of abandonment.
2. All disturbed surfaces will be recontoured to the approximate natural contours with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed in the fall following completion of reclamation operations.

Please refer to Item #10A7 (page #10) for additional information regarding the reseeding operation.

11. Surface Ownership:

The well site and proposed access road are situated on surface lands owned by the Uintah and Ouray Ute Indian Tribes and administered in trust by:

Bureau of Indian Affairs
Uintah & Ouray Agency
P.O. Box 130
Fort Duchesne, Utah 84026
Phone: (801) 722-2406

12. Other Information:

- A. General Description of the Project Area: The proposed drill site is located within the Natural Buttes Unit in an area of northeastern Utah.

12. Other Information: Continued

- A. General Description of the Project Area: Specifically, the well location is situated in an area of moderately eroded uplands located between the White River to the north, Cottonwood Wash to the northeast, Willow Creek to the west, and Sand Wash to the southeast.

This area is classified as a "High Plains Steppe" (Cold Desert) and is characterized by gently to moderately undulated uplands dissected by numerous dendritically-patterned, ephemeral drainages of both the Green and White Rivers. Generally, local flora consists of native grasses such as salt grass, galleta grass, needle-and-thread grass, Indian ricegrass; and woody species such as shadscale, horsebrush, black sagebrush, fringe sagebrush, big sagebrush, rabbitbrush, and greasewood along the dry drainages. Local fauna consists of mule deer, antelope, coyotes, rabbits, raptors, and various smaller vertebrate and invertebrate species.

There are no known threatened or endangered species that will be affected by implementation of operations on the proposed NBU #124 well location.

- B. Surface Use Activities: The primary surface use is for grazing.
- C. Proximity of Water, Occupied Dwellings, Archaeological, Historical or Cultural Sites:
1. The closest source of permanent water is the White River, located approximately 2.0 miles to the north.
 2. The closest occupied dwellings are located in the town of Ouray, approximately seven (7.0) miles to northwest.
 3. A cultural resource clearance will be conducted before any construction activities begin on the proposed NBU #124 well location. If, during operations, any archaeological or historical sites, or any object(s) of antiquity (subject to the Antiquities Act of June 8, 1906) are discovered, all operations which would affect such sites are to be suspended and the discovery reported promptly to the Bureau of Indian Affairs.

12. Other Information:

C. Proximity of Water, Occupied Dwellings, Archaeological, Historical or Cultural Sites: Continued

3. Coastal Oil & Gas Corporation will be responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites or for collecting artifacts.

If historic or archaeological materials are uncovered, Coastal Oil & Gas Corporation will suspend all operations that might further disturb such materials and immediately contact the Authorized Officer.

Within five (5) working days the Authorized Officer will inform Coastal Oil & Gas Corporation as to:

- whether the materials appear eligible for the National Register of Historic Places;
- whether the materials appear eligible for the National Register of Historic Places;
- the mitigation measures the operator will likely have to undertake before the site can be used (assuming in situ preservation is not necessary); and
- a time frame for the Authorized Officer to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the Authorized Officer are correct and that mitigation is appropriate.

If Coastal Oil & Gas Corporation wishes, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the Authorized Officer will assume responsibility for whatever recordation and stabilization of the exposed materials may be required. Otherwise, Coastal Oil & Gas Corporation will be responsible for mitigation costs.

12. Other Information:

- C. Proximity of Water, Occupied Dwellings, Archaeological, Historical or Cultural Sites: Continued
3. The Authorized Officer will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the Authorized Officer that the required mitigation has been completed, Coastal Oil & Gas Corporation will then be allowed to resume construction.
- D. Additional Stipulations for Operations on Lands Administered by the Bureau of Indian Affairs:
1. An archaeologist, approved by the Uintah & Ouray Ute Indian Tribes, will monitor construction of the access road and drill pad on the proposed NBU #118 well location.
 2. If the surface rights are owned by the Ute Indian Tribe and mineral rights are owned by another entity, an approved right-of-way will be obtained from the Bureau of Indian Affairs before the operator begins any construction activities. If the surface is owned by another entity and the mineral rights are owned by the Ute Indian Tribe, rights-of-way will be obtained from the other entity.
 3. All roads constructed by oil and gas operators on the Uintah & Ouray Indian Reservation will have appropriate signs. Signs will be neat and of sound construction. They will state:
 - (a) that the land is owned by the Uintah & Ouray Indian tribes,
 - (b) the name of the Operator,
 - (c) that firearms are prohibited by all non-Tribal members,
 - (d) that permits must be obtained from the Bureau of Indian Affairs before cutting firewood or other timber products, and
 - (e) only authorized personnel are permitted to use said road.

12. Other Information:

D. Additional Stipulations for Operations on Lands
Administered by the Bureau of Indian Affairs: Continued

4. All well site locations on the Uintah & Ouray Indian Reservation will have an appropriate sign indicating the name of the Operator, the lease serial number, the well name and number, the survey description of the well (either footages or the quarter-quarter section, section, township, and range).
5. Coastal Oil & Gas Corporation shall contact the Bureau of Land Management, (801) 789-1362, and the Bureau of Indian Affairs, (801) 722-2406, between 24 and 48 hours prior to commencement of construction activities.
6. The BLM and BIA offices shall be notified upon site completion and prior to moving drilling tools onto the location.
7. Coastal Oil & Gas Corporation will control noxious weeds along rights-of-way for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds may be obtained from the Bureau of Indian Affairs, or the Uintah County Extension Office. On lands administered by the Bureau of Indian Affairs, it is required that a "Pesticide Use Proposal" shall be submitted, and approval obtained, prior to the application of herbicides or other pesticides or possible hazardous chemicals for the control of noxious weeds.

13. Lessee's or Operator's Representative and Certification:

Representative

Coastal Oil & Gas Corporation
Randy L. Bartley, Operations Manager
P.O. Box 749
Denver, Colorado 80201-0749
Phone: (303) 572-1121

13. Lessee's or Operator's Representative and Certification:

Representative - Continued

Heitzman Drill-Site Services*
Dale Heitzman and/or Robert M. Anderson
P.O. Drawer 3579
Casper, Wyoming 82602
Phone: (307) 266-4840

* Contact for any additional information which may be required for approval of this Application for Permit to Drill.

Certification:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil & Gas Orders, the approved plan of operations, and any applicable Notice to Lessees.

Coastal Oil & Gas Corporation will be fully responsible for the actions of their subcontractors.

A complete copy of the approved Application for Permit to Drill will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Coastal Oil & Gas Corporation, its' contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

1 March 1991
Date



Robert M. Anderson/Authorized Agent

COASTAL OIL & GAS CORP.





LOCATION LAYOUT FOR

NBU #124

SECTION 16, T9S, R21E, S.L.B.&M.

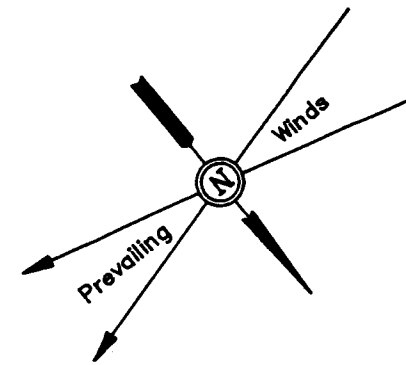

SCALE: 1" = 50'
DATE: 1-1-91
Drawn By: J.R.S.

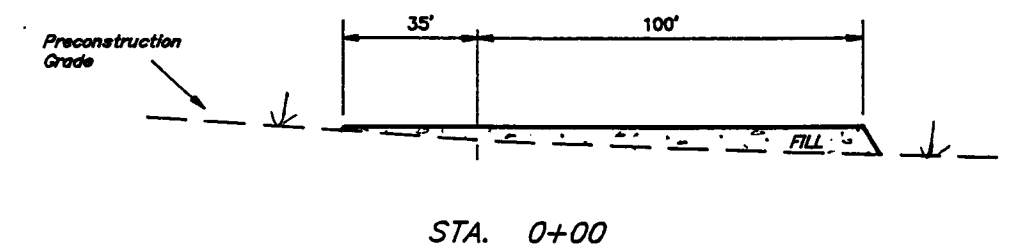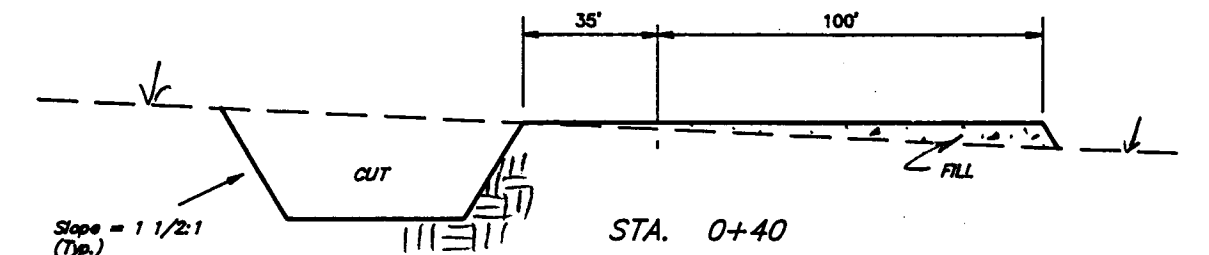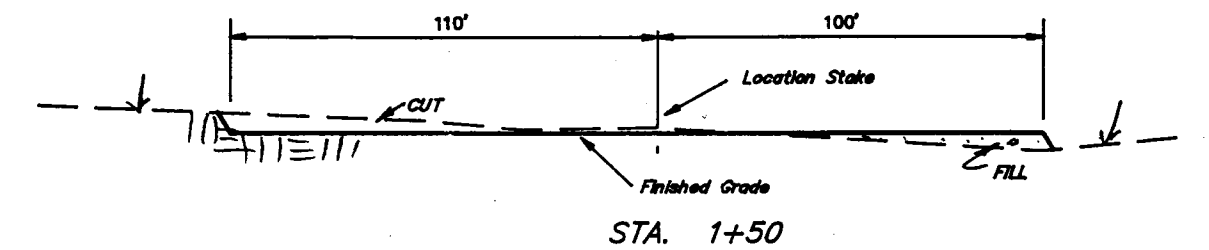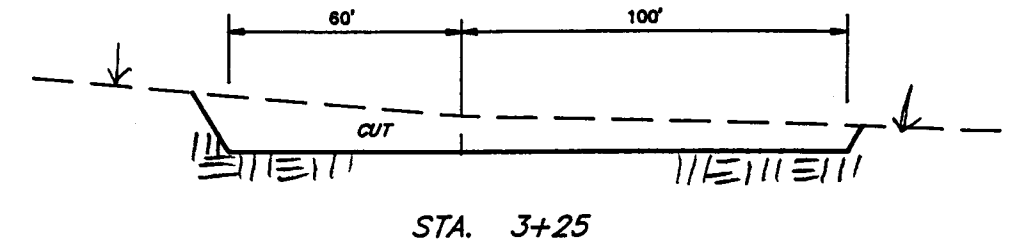

TYP. LOCATION LAYOUT
TYP. CROSS SECTIONS


NOTES:

Elev. Ungraded Ground At Loc. Stake = 4795.9'

FINISHED GRADE ELEV. AT LOC. STAKE = 4795.4'

UINTAH ENGINEERING & LAND SURVEYING


85 South 200 East Vernal, Utah

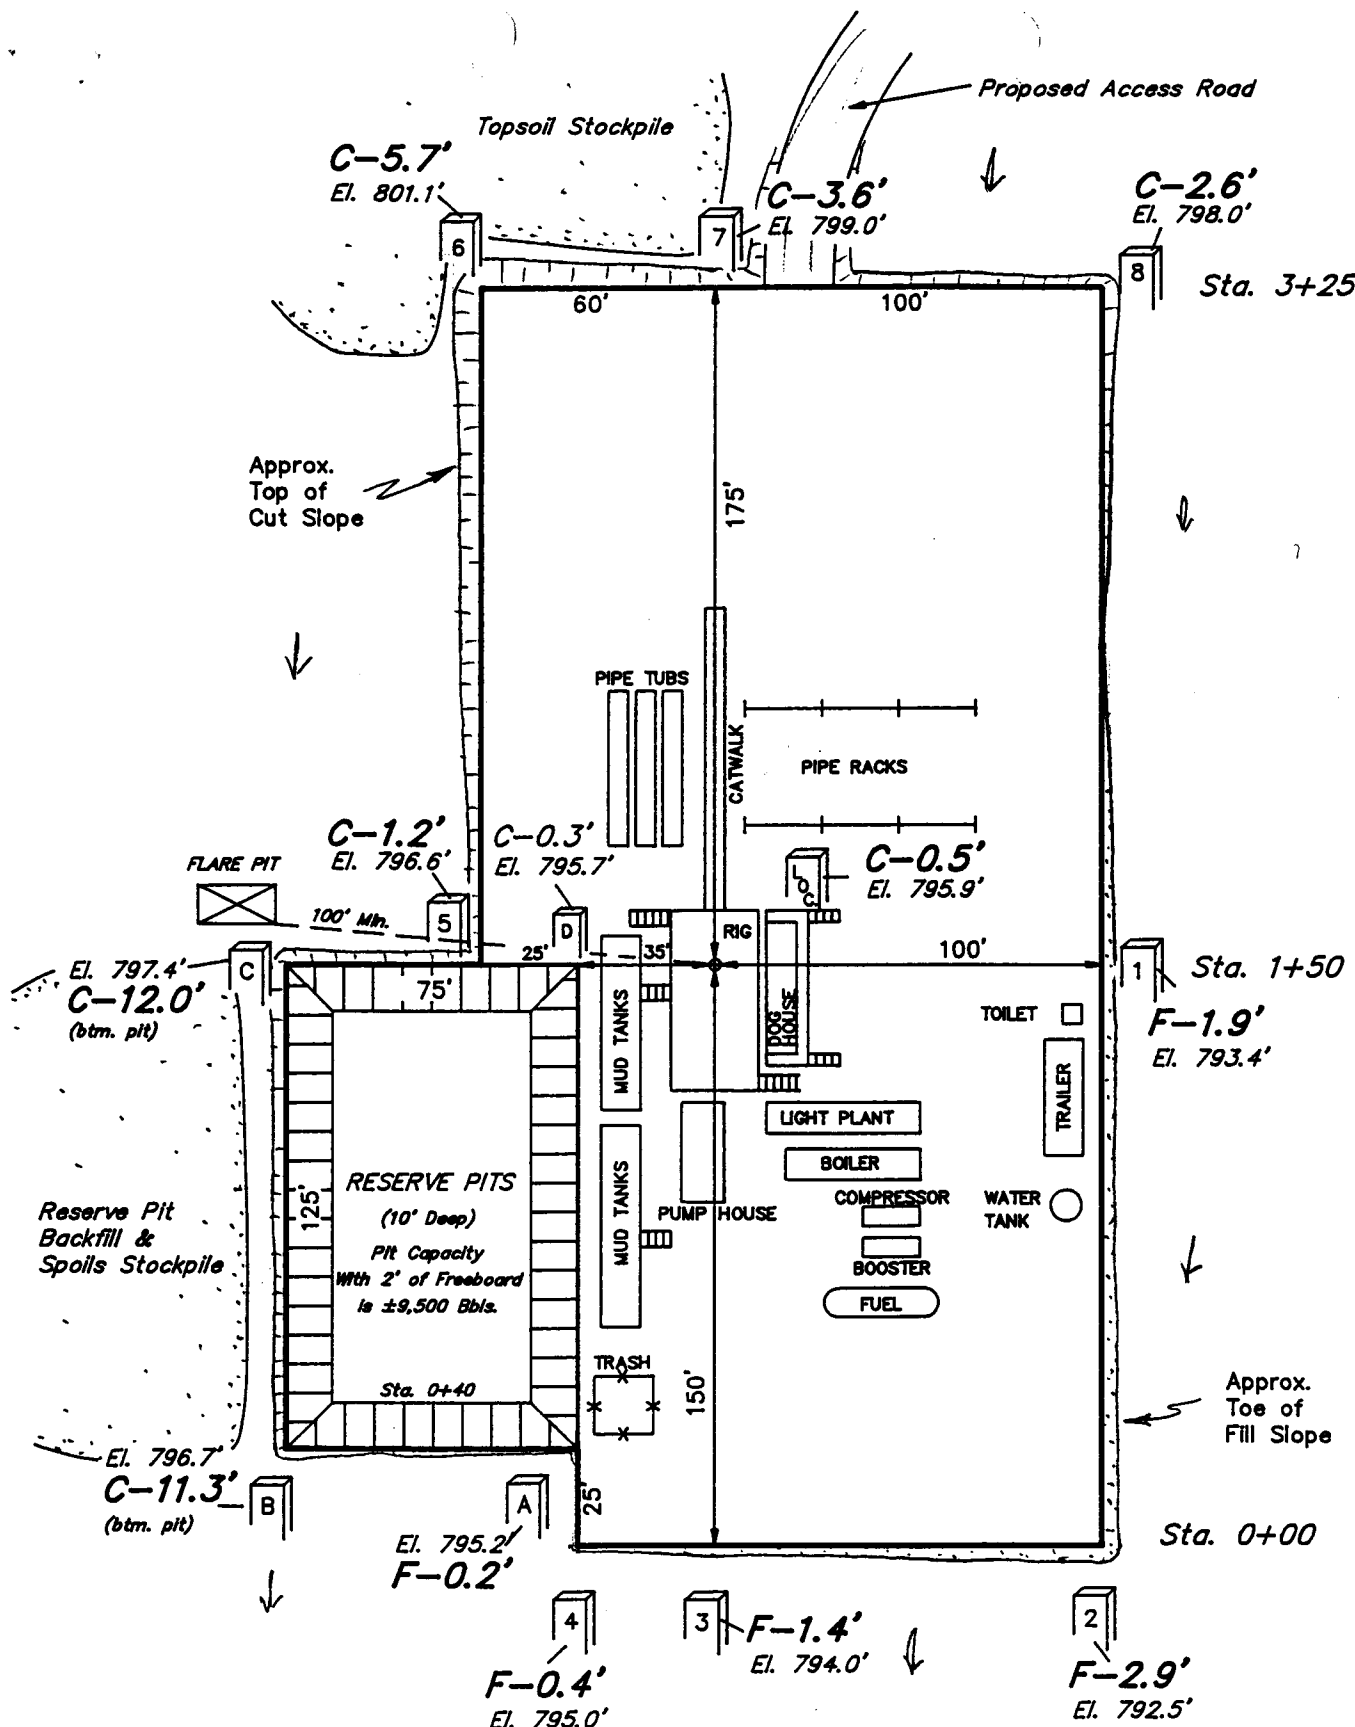


APPROXIMATE YARDAGES

CUT	
(12") Topsoil Stripping	= 2,130 Cu. Yds.
Remaining Location	= 4,010 Cu. Yds.
TOTAL CUT	= 6,140 CU.YDS.
FILL	= 2,250 CU.YDS.

EXCESS MATERIAL AFTER 5% COMPACTION	= 3,770 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,350 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 20 Cu. Yds.



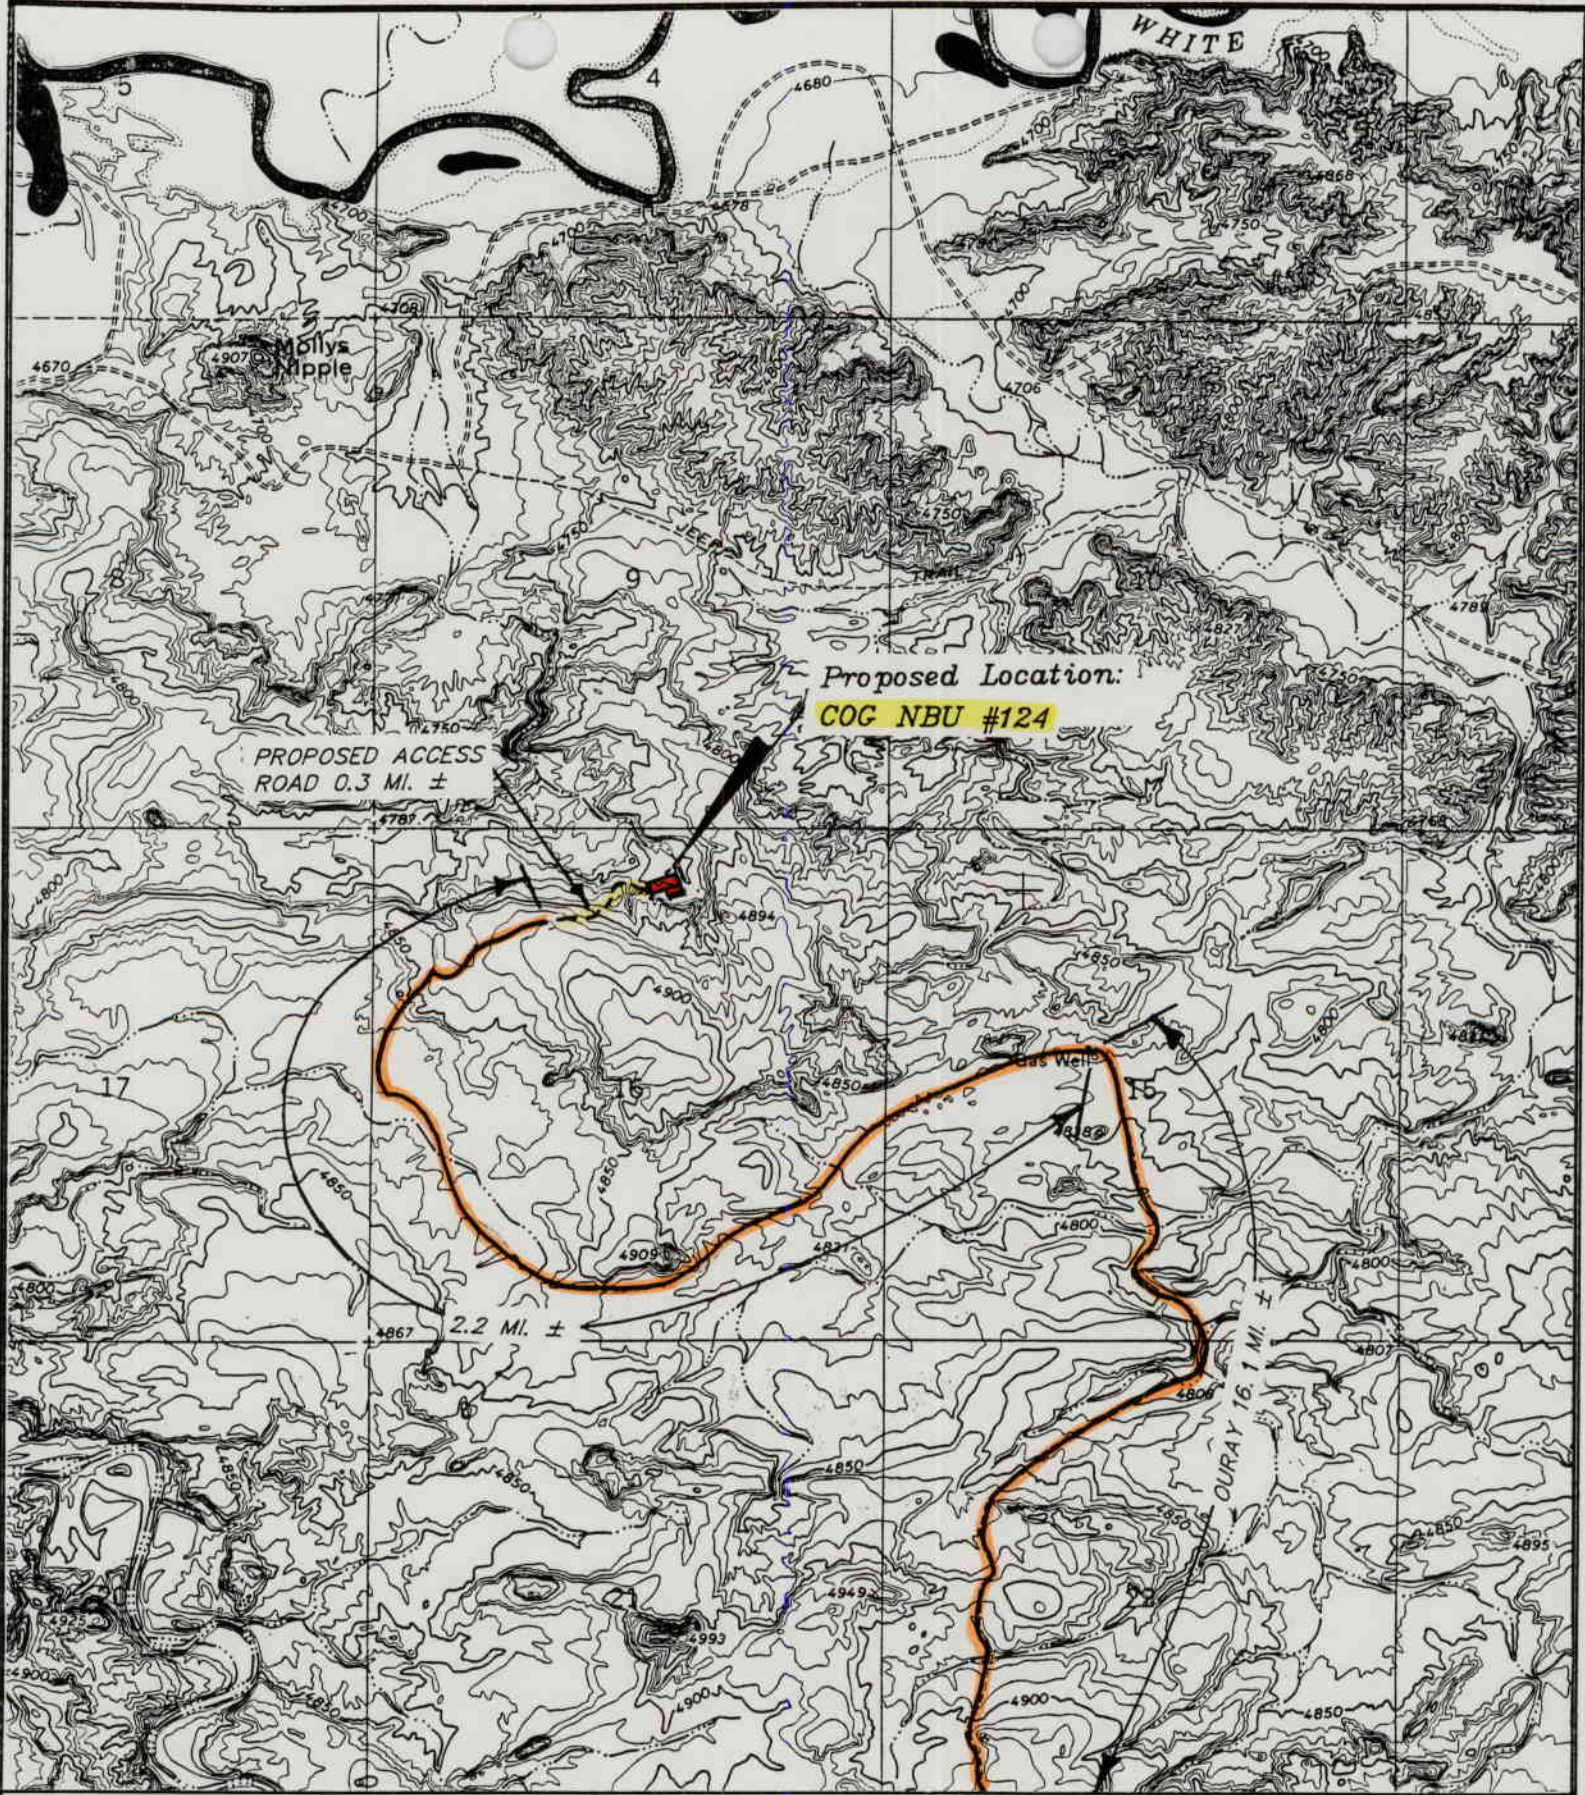

TOPOGRAPHIC

MAP "B"

SCALE: 1" = 2000'


DATE 11-29-90



COASTAL OIL & GAS CORP.

COG NBU #124

SECTION 16, T9S, R21E, S.L.B.&M.

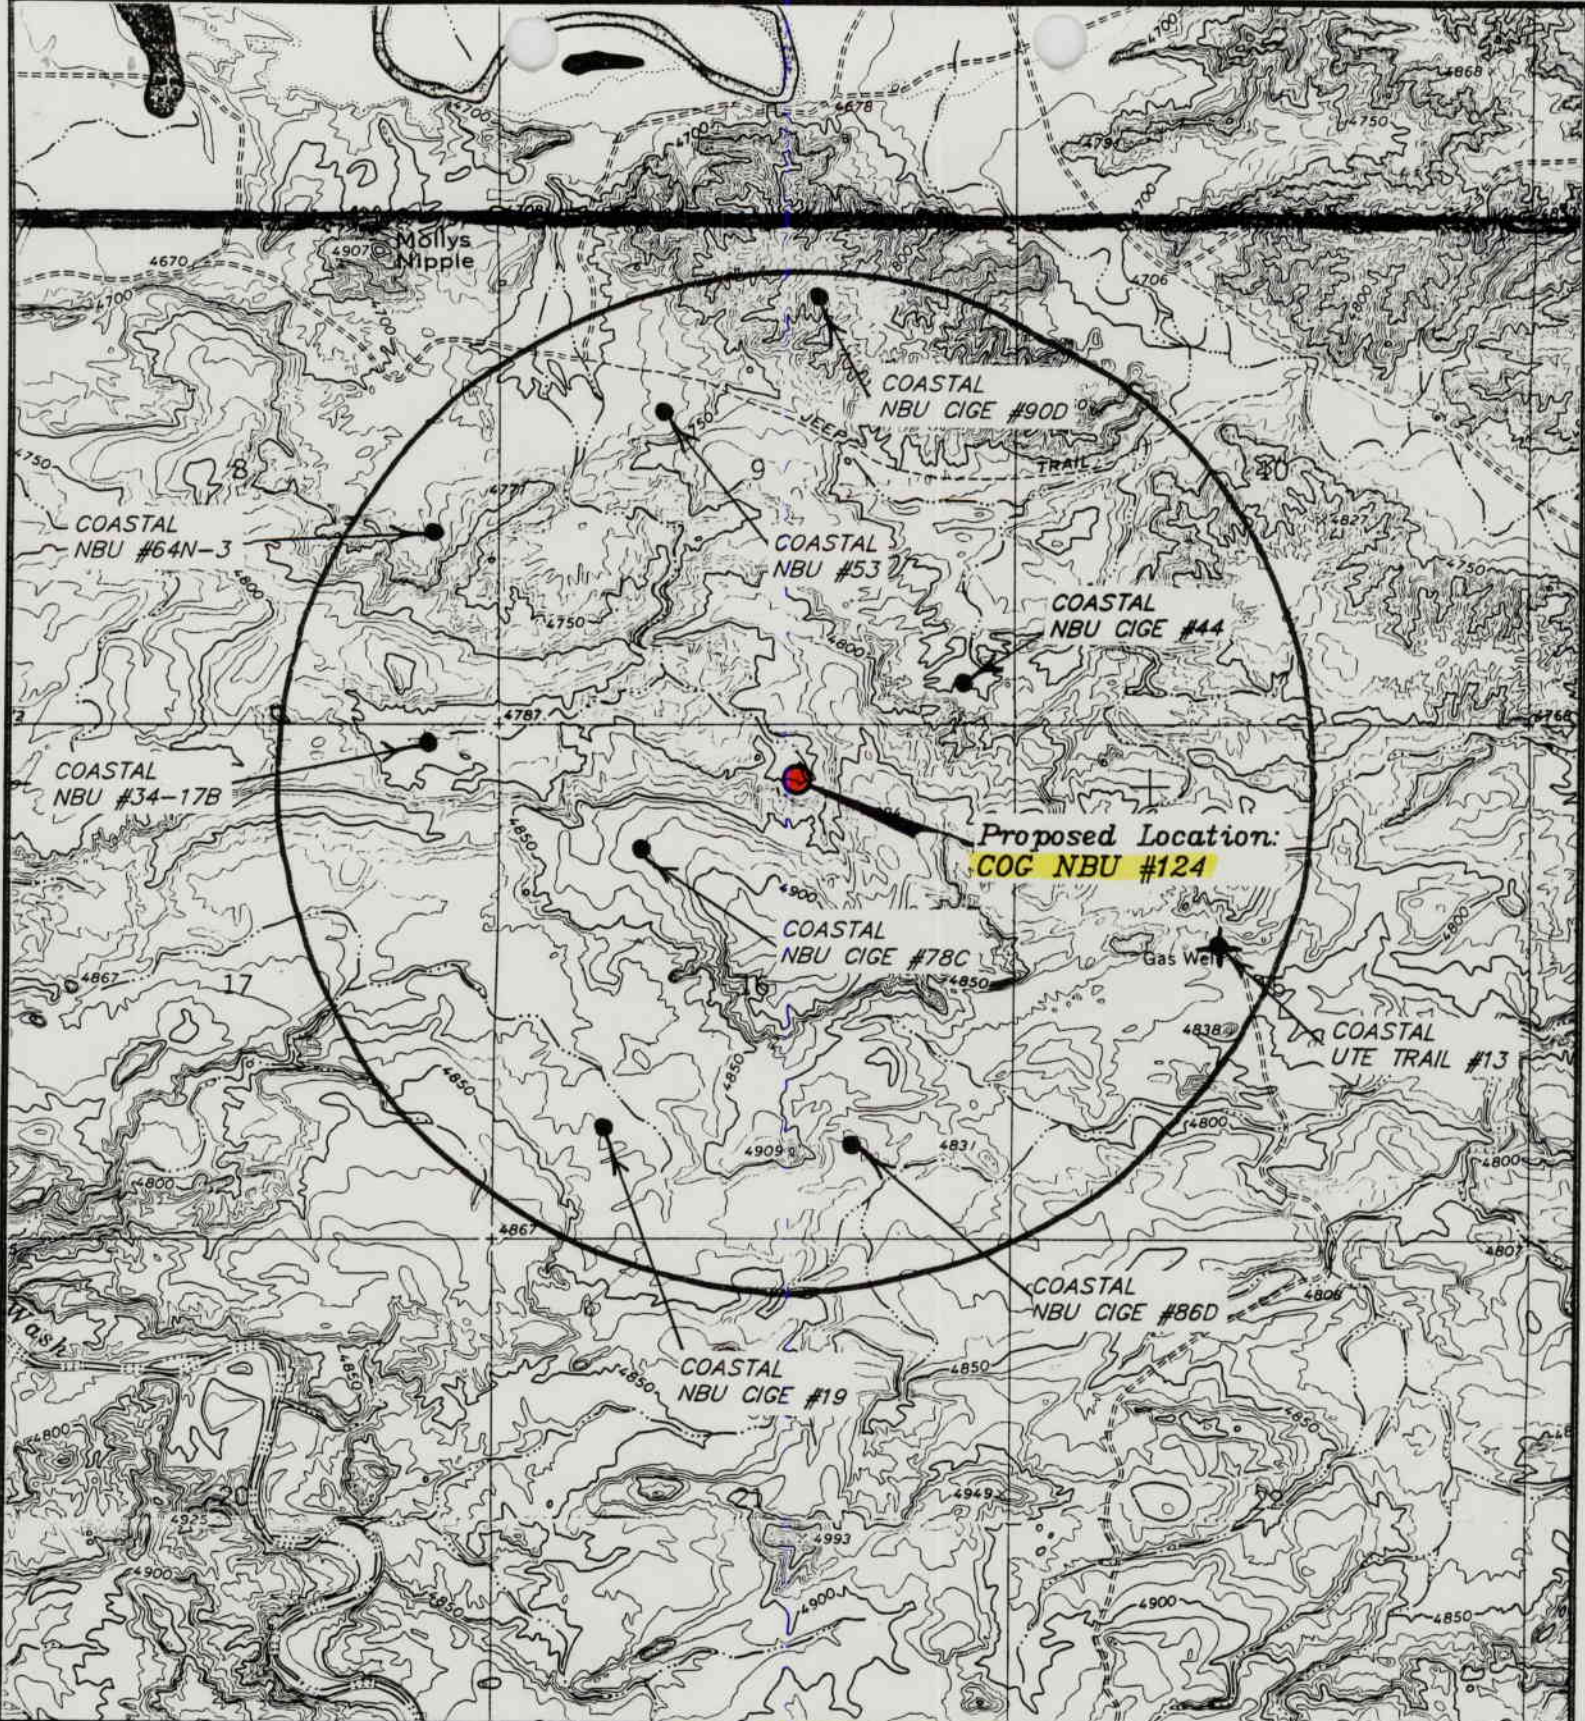

LEGEND:

- ⊗ = Water Wells
- ◆ = Abandoned Wells
- = Temporarily Abandoned Wells
- ⊘ = Disposal Wells
- = Drilling Wells
- = Producing Wells
- ◆ = Shut-in Wells



COASTAL OIL & GAS CORP.

COG NBU #124

SECTION 16, T9S, R21E, S.L.B.&M.

TOP O MAP "C"


DATE: 1-16-91

OPERATOR Coastal Oil & Gas Corp. N 0030 DATE 3-8-91
WELL NAME NB 104
SEC N 10 E T 10 R 01 E COUNTY Montah


43 047 31971
API NUMBER

Natural (1)
TYPE OF LEASE

CHECK OFF:




PLAT.



BOND



NEAREST
WELL



LEASE



FIELD
SLBM




POTASH OR
OIL SHALE

PROCESSING COMMENTS:

Included in 1991 POD approved 10-20-90.
Water Permit 49-991 (A57530) / Large Trucking
Oil shale stipulation

APPROVAL LETTER:

SPACING:



R615-2-3

Natural Buttes
UNIT



R615-3-2



N/A
CAUSE NO. & DATE



R615-3-3

STIPULATIONS:

1- Oil shale stipulation



State of Utah

DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Norman H. Bangerter
Governor

Dee C. Hansen
Executive Director

Dianne R. Nielson, Ph.D.
Division Director

355 West North Temple
3 Triad Center, Suite 350
Salt Lake City, Utah 84180-1203
801-538-5340

March 11, 1991

Coastal Oil & Gas Corporation
P. O. Box 749
Denver, Colorado 80201-0749

Gentlemen:

Re: NBU 124 Well, 435 feet from the North line and 2295 feet from the East line, NW NE, Section 16, Township 9 South, Range 21 East, Uintah County, Utah

Approval to drill the referenced well is hereby granted in accordance with Utah Code Ann. Section 40-6-18, et seq. (1953, as amended), and Utah Admin. R.615-2-3, subject to the following stipulation:

1. Special attention is directed to compliance with Utah Admin. R.615-3-31, which prescribes drilling procedures for designated oil shale areas.

In addition, the following actions are necessary to fully comply with this approval:


1. Spudding notification within 24 hours after drilling operations commence.
2. Submittal of Entity Action Form 6, within five working days following spudding and whenever a change in operations or interests necessitates an entity status change.
3. Submittal of the Report of Water Encountered During Drilling, Form 7.
4. Prompt notification in the event it is necessary to plug and abandon the well. Notify R. J. Firth, Associate Director, (Office) (801) 538-5340, (Home) 571-6068, or J. L. Thompson, Lead Inspector, (Home) 298-9318.
5. Compliance with the requirements of Utah Admin. R.615-3-20, Gas Flaring or Venting.

Page 2
Coastal Oil & Gas Corporation
NBU 124
March 11, 1991

6. Prior to commencement of the proposed drilling operations, plans for facilities for disposal of sanitary wastes at the drill site shall be submitted to the local health department. These drilling operations and any subsequent well operations must be conducted in accordance with applicable state and local health department regulations. A list of local health departments and copies of applicable regulations are available from the Division of Environmental Health, Bureau of Drinking Water/Sanitation, telephone (801) 538-6159.
7. This approval shall expire one (1) year after date of issuance unless substantial and continuous operation is underway or an application for an extension is made prior to the approval expiration date.

The API number assigned to this well is 43-047-31971.

Sincerely,



R. J. Finn
Associate Director, Oil & Gas

tas
Enclosures
cc: Bureau of Land Management
J. L. Thompson
we14/1-58

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

APR 17 1992

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS, OIL, GAS & MINING

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No

P. O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

See Attached List

5. Lease Designation and Serial No.

See Attached List

6. If Indian, Allottee or Tribe Name

See Attached List

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

See Attached List

9. API Well No.

See Attached List

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other NTL 2B; IV
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Coastal Oil & Gas Corporation hereby requests permission to dispose of produced water in unlined pits per NTL-2B, IV, for the subject wells.

- These wells are completed in the Wasatch formation and produce less than 5 barrels of water per day on a monthly basis.
- Two unlined pits per location will be used due to the size and layout of the locations: 40' x 40' x 8' and 6' x 6' x 6' deep with berms surrounding them. Each pit will be fenced and will have cement corner posts per BLM specifications. (See the attached typical facilities diagram.)
- The average evaporation rate for the area compensated for annual rainfall is 70" per year.
- The estimated percolation rate based on the soil characteristics under and adjacent to the pits is 2-6" per hour.
- The depth of usable water aquifers in this area is approximately 1500'.

14. I hereby certify that the foregoing is true and correct.

Signed Eileen Danni Dey Title Regulatory Analyst Date 4/14/92

(This space for Federal or State office use)


Approved by _____
Conditions of approval, if any:

Title _____

Accepted by the State
of Utah Division of
Oil, Gas and Mining
Date: 4-29-92

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

COASTAL OIL & GAS CORP.
NATURAL BUTTES UNIT
TYPICAL FACILITIES LAYOUT
NTL-2B; IV

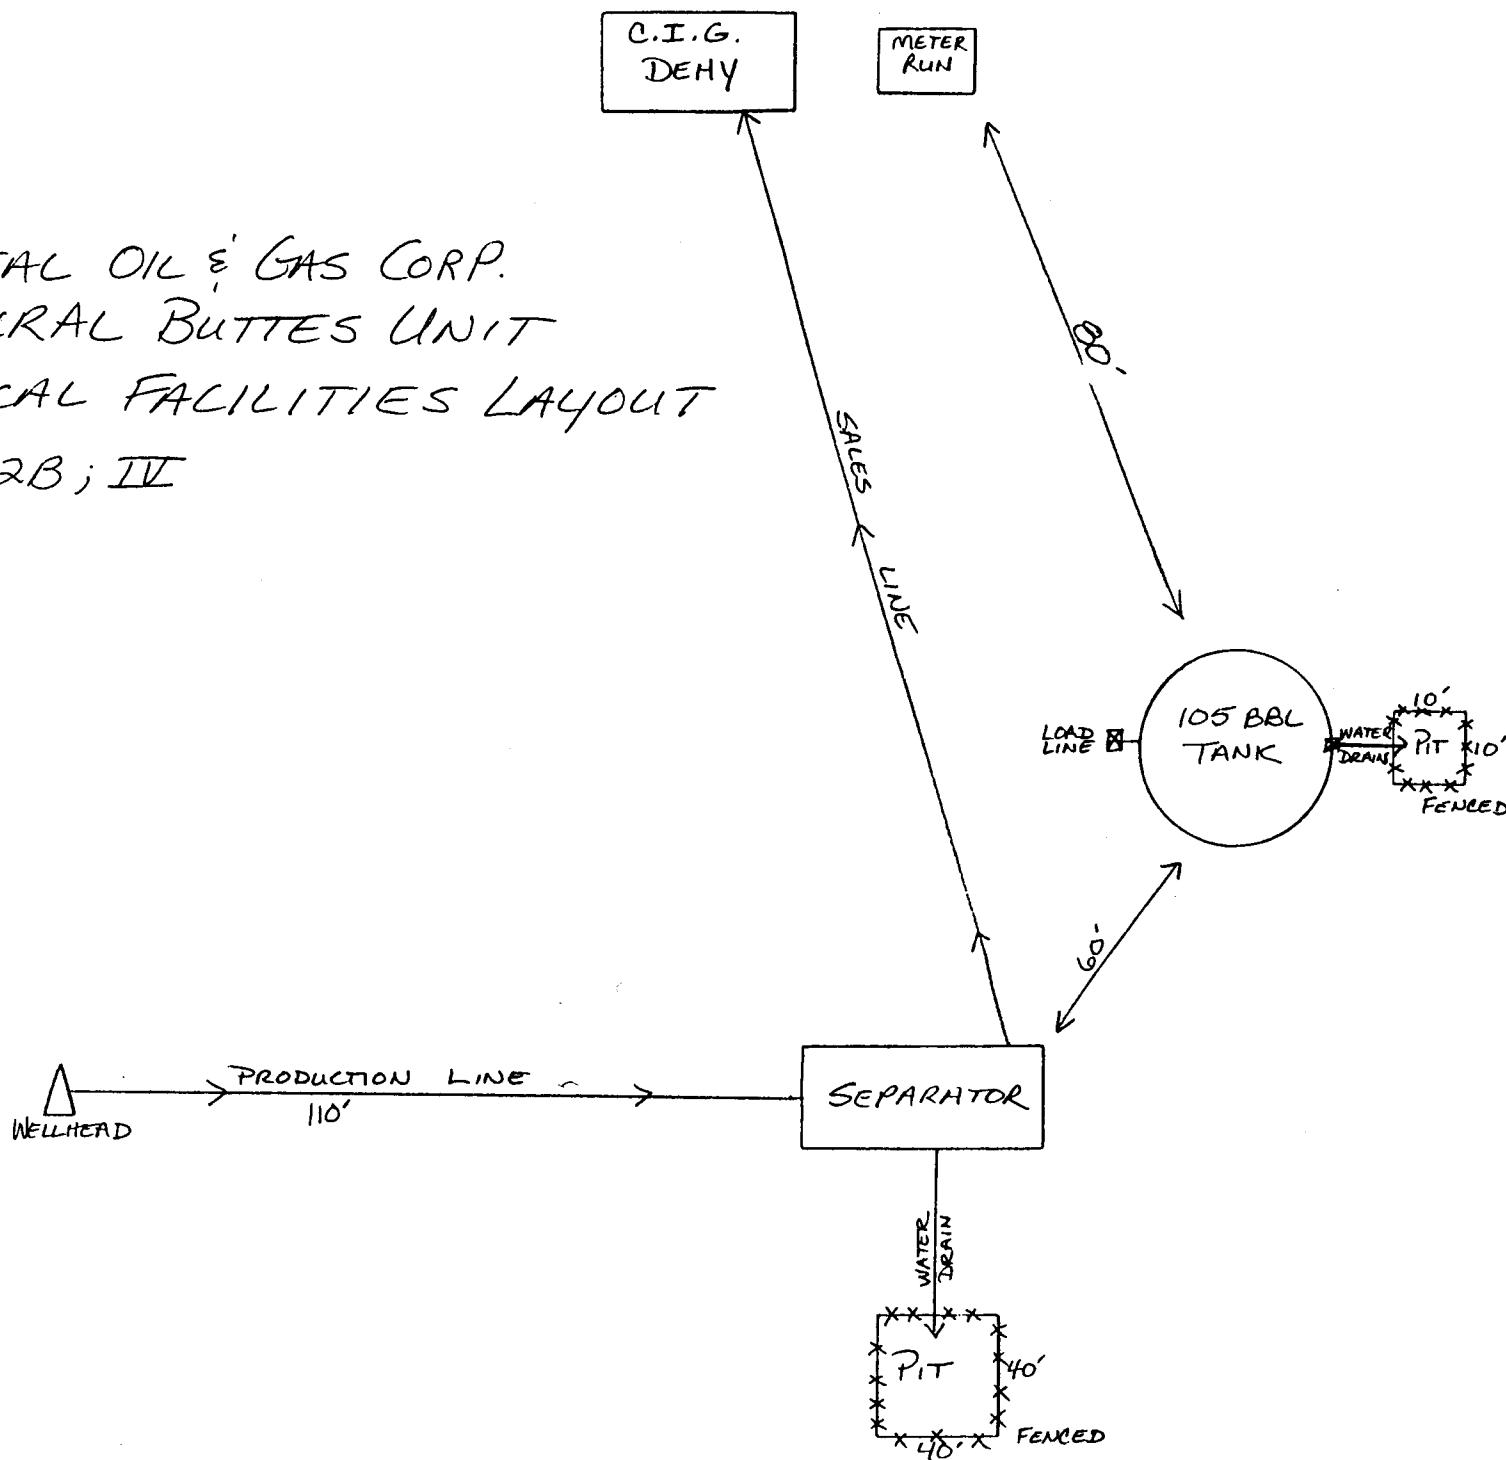

13-Apr-92

NATURAL BUTTES

UINTAH COUNTY, UTAH

WELL #	LOCATION	STATE OR BLM	API
QUAD SEC TWP RGE	LEASE #	SURFACE	NUMBER
NBU #103	SENW 10 9 21	U-0141315	UTE 43-047-31956
NBU #104	SENE 16 9 21	ST ML-3282	UTE 43-047-31957
NBU #105	SWSW 17 9 21	U-0575	UTE 43-047-31955
NBU #106	NESW 21 9 21	U-0576	UTE 43-047-31946
NBU #107	SENW 26 9 21	ST ML-01194	STATE 43-047-31916
NBU #108	SESE 19 9 22	U-0284	UTE 43-047-31958
NBU #109	SENE 27 9 21	ST U-01194-A	STATE 43-047-31917
NBU #110	NENE 28 9 21	U-0576	FED. 43-047-31924
NBU #111	SWNW 25 9 21	ST U-01194	STATE 43-047-31920
NBU #112	SESE 33 9 22	U-01191	FED. 43-047-31930
NBU #113	SESE 34 9 22	U-0149077	FED. 43-047-31931
NBU #114	SWSW 5 10 21	U-01393-D	FED. 43-047-31923
NBU #115	NENW 10 10 21	U-0149079	FED. 43-047-31929
NBU #116	NWNW 6 10 22	U-464	FED. 43-047-31925
NBU #117	NENE 10 10 22	ST UT-01197-A	STATE 43-047-31914
NBU #118	SENE 22 9 20	U-0577-B	UTE 43-047-31969
NBU #119	SENW 22 9 20	U-0577-B	UTE 43-047-31973
NBU #120	NWNW 10 9 21	U-0141315	UTE 43-047-31972
NBU #121	NWNE 13 9 21	U-01193	UTE 43-047-
NBU #122	SWSE 13 9 21	U-01193	UTE 43-047-32085
NBU #123	NWNW 15 9 21	U-01188	UTE 43-047-31974
NBU #124	NWNE 16 9 21	ST ML-3282	UTE 43-047-31971
NBU #125	NESE 17 9 21	U-0575	UTE 43-047-32090
NBU #126	NENW 21 9 21	U-0576	UTE 43-047-31962
NBU #127	SWNW 21 9 21	U-0576	UTE 43-047-31963
NBU #128	SWSW 21 9 21	U-0576	UTE 43-047-31964
NBU #129	SENE 22 9 21	U-010950-A	UTE 43-047-31965
NBU #130	SWNW 22 9 21	U-0147566	UTE 43-047-31967
NBU #131	NWSW 23 9 21	U-0149075	UTE 43-047-31966
NBU #132	NWNW 26 9 21	ST U-01194	STATE 43-047-31938
NBU #133	SWNE 28 9 21	U-0576	FED. 43-047-31950
NBU #134	SWSW 28 9 21	U-0576	FED. 43-047-32011
NBU #135	NESE 18 9 22	U-461	UTE 43-047-32089
NBU #136	SWSE 19 9 22	U-0284	UTE 43-047-31968
NBU #137	SESE 30 9 22	ST ML-22935	STATE 43-047-31939
NBU #138A	SENE 33 9 22	U-01191-A	FED. 43-047-32151
NBU #139	SWNE 14 10 21	U-465	FED. 43-047-31948
NBU #140	NWNE 5 10 22	U-01191A	FED. 43-047-31947
NBU #141	SENW 6 10 22	U-464	FED. 43-047-32017
NBU #142	NESE 10 10 22	U-025187	FED. 43-047-32013
NBU #143	NWNE 10 9 21	U-0141315	UTE 43-047-32088
NBU #144	NWNW 23 9 21	U-0149075	UTE 43-047-32044
NBU #145	NWNE 27 9 21	ST U-01194-A	STATE 43-047-31976
NBU #146	SWNW 14 10 21	U-465	FED. 43-047-31985
NBU #147	NWSW 4 10 22	U-01191	FED. 43-047-31984
NBU #148	SESW 4 10 22	U-01191	FED. 43-047-31983
NBU #149	NESE 5 10 22	U-01191	FED. 43-047-31982
NBU #150	SENW 9 10 22	U-01196-B	FED. 43-047-31992
NBU #151	NWNW 9 10 22	U-01196-B	FED. 43-047-31991
NBU #152	SESE 9 10 22	U-01196-D	FED. 43-047-31990
NBU #153	SWNW 11 10 22	ST U-01197-A	STATE 43-047-31975
NBU #154	NWSE 26 9 21	ST ML-22934	STATE 43-047-32003
NBU #155	SENW 31 9 22	ST ML-23607	STATE 43-047-32004
NBU #156	SWNW 35 9 21	ST U-01194	STATE 43-047-32005
NBU #157	SESW 32 9 22	ST ML-22649	STATE 43-047-32007
NBU #158	NWSE 27 9 21	ST U-01194-A	STATE 43-047-31997
NBU #159	NESW 35 9 21	ST U-01194	STATE 43-047-31996
NBU #160	SESW 31 9 22	ST ML-22935-A	STATE 43-047-32006
NBU #161	SESE 32 9 22	ST ML-22649	STATE 43-047-32023
NBU #162	SENW 12 10 20	U-4478	FED. 43-047-32066
NBU #163	NENW 14 10 21	U-465	FED. 43-047-32069
NBU #164	NWSE 3 10 22	U-01191-A	FED. 43-047-32055
NBU #165	NENW 3 10 22	U-01191	FED. 43-047-32057
NBU #166	SWSE 28 9 21	U-0576	FED. 43-047-32065
NBU #167	SESW 25 9 21	ST U-01194	STATE 43-047-32054
NBU #168	NWSW 12 10 20	U-4478	FED. 43-047-32117
NBU #169	SESW 12 10 20	U-4478	FED. 43-047-32118

13-Apr-92

NATURAL BUTTES

UINTAH COUNTY, UTAH

WELL #	LOCATION	QUAD	SEC	TWP	RGE	STATE OR BLM LEASE #	SURFACE	API NUMBER
NBU #170	NWNW	4	10	22		U-01191-A	FED.	43-047-32169
NBU #171	SENE	5	10	22		U-01191-A	FED.	43-047-32115
NBU #172	NENE	19	9	22		U-0284	UTE	43-047-32194
NBU #173	NWNE	33	9	22		U-01191-A	FED.	43-047-32116
NBU #174	NWNW	11	9	21		U-0141315	UTE	43-047-32193
NBU #175	NENW	28	9	21		U-0576	FED.	43-047-32143
NBU #176	SWNW	28	9	21		U-0576	FED.	43-047-32144
NBU #177	NESE	29	9	21		U-0581	FED.	43-047-32112
NBU #178	NWNE	30	9	21		U-0581	FED.	43-047-32121
NBU #179	SWSW	10	10	21		U-01416-A	FED.	43-047-32145
NBU #180	SWSE	10	10	22		U-025187	FED.	43-047-32113
NBU #181	SESW	9	9	21		U-0576	UTE	43-047-32161
NBU #182	SENW	11	9	21		U-0141315	UTE	43-047-32162
NBU #183 ✓	SWNW	27	9	21	ST	U-01194-A	STATE	43-047-32122
NBU #184	SESW	30	9	22		U-463	FED.	43-047-32170
NBU #185	SWNE	3	10	22		U-01191-A	FED.	43-047-32171
NBU #186	SENE	30	9	22		U-463	FED.	43-047-
NBU #187	SESW	34	9	22		U-0149077	FED.	43-047-
NBU #188	SWSW	10	10	22		U-01196-C	FED.	43-047-
NBU #189	SESW	23	9	21		U-0149075	UTE	43-047-
NBU #190 ✓	NWNE	26	9	21	ST	U-01194	STATE	43-047-
CIGE 110-7-9-21	SWSE	7	9	21		U-0575-B	UTE	43-047-31959
CIGE 111-13-9-21	SESW	13	9	21		U-01193	UTE	43-047-31954
CIGE 112-19-9-21	SESE	19	9	21		U-0581	UTE	43-047-31945
CIGE 113-21-9-21	SWNE	21	9	21		U-0576	UTE	43-047-31944
CIGE 114-34-9-21 ✓	NESE	34	9	21	ST	U-01194-A	STATE	43-047-31915
CIGE 115-35-9-21 ✓	NWNE	35	9	21	ST	ML-22582	STATE	43-047-31918
CIGE 116-29-9-22 ✓	NWSW	29	9	22	ST	ML-22935	STATE	43-047-31919
CIGE 117-34-9-22	SWNW	34	9	22		U-0149077	FED.	43-047-31928
CIGE 118-35-9-22	NESE	35	9	22		U-010954A	FED.	43-047-32025
CIGE 119-15-10-21	NENE	15	10	21		U-01416-A	FED.	43-047-31927
CIGE 120-15-9-20	SENE	15	9	20		U-0144868	UTE	43-047-32032
CIGE 121-15-9-20	NWNE	15	9	20		U-0144868	UTE	43-047-32031
CIGE 122-7-9-21	NENE	7	9	21		U-0149767	UTE	43-047-32098
CIGE 123-7-9-21	SWNE	7	9	21		U-0575-B	UTE	43-047-32047
CIGE 124-9-9-21	NWSE	9	9	21		U-01188	UTE	43-047-32045
CIGE 125-13-9-21	NWNW	13	9	21		U-01193	UTE	43-047-32084
CIGE 126-13-9-21	NWSW	13	9	21		U-01193	UTE	43-047-32087
CIGE 127-16-9-21	NESW	16	9	21	ST	ML-3141	UTE	43-047-32036
CIGE 128-18-9-21	NENE	18	9	21		U-0575	UTE	43-047-32046
CIGE 129-18-9-21	NENW	18	9	21		U-0581	UTE	43-047-32043
CIGE 130-19-9-21	NENE	19	9	21		U-0581	UTE	43-047-32030
CIGE 131-19-9-21	SWNE	19	9	21		U-0581	UTE	43-047-32029
CIGE 132-20-9-21	NWSW	20	9	21		U-0575	UTE	43-047-32028
CIGE 133-35-9-21 ✓	SWSE	35	9	21	ST	ML-22582	STATE	43-047-31978
CIGE 134-1-10-20	SWSW	1	10	20		U-02270-A	FED.	43-047-31989
CIGE 135-3-10-21	SWSW	3	10	21		U-0149078	FED.	43-047-32001
CIGE 136-4-10-21 ✓	SWNE	4	10	21	ST	ML-22940	STATE	43-047-31979
CIGE 137-6-10-21	SENE	6	10	21		U-01791	FED.	43-047-31988
CIGE 138A-6-10-21	SENW	6	10	21		U-01791	FED.	43-047-31987
CIGE 139-10-10-21	SWNE	10	10	21		U-0149079	FED.	43-047-31986
CIGE 140-16-10-21 ✓	NENE	16	10	21	ST	ML-10755	STATE	43-047-31977
CIGE 141-7-10-22 ✓	NWNE	7	10	22	ST	ML-23609	STATE	43-047-31970
CIGE 142-25-9-21 ✓	SENE	25	9	21	ST	U-01189	STATE	43-047-31994
CIGE 143-34-9-21 ✓	SWNE	34	9	21	ST	U-01194-A	STATE	43-047-31995
CIGE 144-2-10-22 ✓	SWNE	2	10	22	ST	ML-22651	STATE	43-047-32022
CIGE 145-29-9-22 ✓	SENW	29	9	22	ST	ML-22935	STATE	43-047-31993
CIGE 146-16-10-21 ✓	NWNE	16	10	21	ST	ML-10755	STATE	43-047-32021
CIGE 147-36-9-22 ✓	SESW	36	9	22	ST	ML-22650	STATE	43-047-32020
CIGE 148-31-9-22 ✓	NWNE	31	9	22	ST	ML-22935-A	STATE	43-047-32024
CIGE 149-8-10-21	NWNE	8	10	21		U-01791	FED.	43-047-32056
CIGE 150-9-10-21	SWNE	9	10	21		U-01416	FED.	43-047-32058
CIGE 151-10-10-21	SWSE	10	10	21		U-0149079	FED.	43-047-32059
CIGE 152-33-9-22	SESW	33	9	22		U-01191-A	FED.	43-047-32068
CIGE 153-35-9-22	SESW	35	9	22		U-010954-A	FED.	43-047-32067
CIGE 154-13-10-20	NWNW	13	10	20		U-4485	STATE	43-047-32119
CIGE 155-9-9-21	SENE	9	9	21		U-01188-B	UTE	43-047-32157

13-Apr-92

NATURAL BUTTES

UINTAH COUNTY, UTAH

WELL #	LOCATION	QUAD	SEC	TWP	RGE	STATE OR BLM LEASE #	SURFACE	API NUMBER
CIGE 156-16-9-21	NESE	16	9	21		ST ML-3282	UTE	43-047-32195
CIGE 157-16-9-21	SWNW	16	9	21		U-38409	UTE	43-047-32160
CIGE 158-21-9-21	NESE	21	9	21		U-0576	UTE	43-047-32158
CIGE 159-6-10-21	NWNE	6	10	21		U-01791	FED.	43-047-32120
CIGE 160-14-10-21	SWSE	14	10	21		U-01393-C	FED.	43-047-32124
CIGE 161-2-10-22	SESE	2	10	22		ST ML-22651	STATE	43-047-32168
CIGE 162-36-9-22	SESE	36	9	22		ST ML-22650	STATE	43-047-32164
CIGE 163-15-9-21	SENE	15	9	21		U-01193	UTE	43-047-32192
CIGE 164-34-9-22	NWNE	34	9	22		U-0149077	FED.	43-047-32141
CIGE 165-1-10-20	SWNW	1	10	20		U-02270-A	FED.	43-047-32114
CIGE 166-3-10-21	NENW	3	10	21		U-0149078	FED.	43-047-32172
CIGE 167-7-10-21	NENE	7	10	21		U-01791	FED.	43-047-32142
CIGE 168-16-10-21	NWSE	16	10	21		ST ML-10755	STATE	43-047-32123
CIGE 169-2-10-21	SENE	2	10	21		ST ML-22652	STATE	43-047-

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells.
Use APPLICATION FOR PERMIT for such proposals.

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other (specify)		6. Lease Designation and Serial Number State ML-3282
2. Name of Operator Coastal Oil & Gas Corporation		7. Indian Allottee or Tribe Name N/A
3. Address of Operator P. O. Box 749 Denver, CO 80201-0749		8. Unit or Communitization Agreement Natural Buttes Unit
4. Telephone Number (303) 573-4476		9. Well Name and Number NBU #124
5. Location of Well Footage : 435' FNL & 2295' FEL Q.Q. Sec. T., R., M. : NW/NE Section 16, T9S-R21E		10. API Well Number 43-047-31971
County : Uintah State : UTAH		11. Field and Pool, or Wildcat Natural Buttes

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

NOTICE OF INTENT (Submit in Duplicate)

- | | |
|--|---|
| <input type="checkbox"/> Abandonment | <input type="checkbox"/> New Construction |
| <input type="checkbox"/> Casing Repair | <input type="checkbox"/> Pull or Alter Casing |
| <input type="checkbox"/> Change of Plans | <input type="checkbox"/> Recompletion |
| <input type="checkbox"/> Conversion to Injection | <input type="checkbox"/> Shoot or Acidize |
| <input type="checkbox"/> Fracture Treat | <input type="checkbox"/> Vent or Flare |
| <input type="checkbox"/> Multiple Completion | <input type="checkbox"/> Water Shut-Off |
| <input type="checkbox"/> Other | |

Approximate Date Work Will Start _____

SUBSEQUENT REPORT (Submit Original Form Only)

- | | |
|--|---|
| <input type="checkbox"/> Abandonment | <input type="checkbox"/> New Construction |
| <input type="checkbox"/> Casing Repair | <input type="checkbox"/> Pull or Alter Casing |
| <input type="checkbox"/> Change of Plans | <input type="checkbox"/> Shoot or Acidize |
| <input type="checkbox"/> Conversion to Injection | <input type="checkbox"/> Vent or Flare |
| <input type="checkbox"/> Fracture Treat | <input type="checkbox"/> Water Shut-Off |
| <input checked="" type="checkbox"/> Other | Report of Spud |

Date of Work Completion _____

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION AND LOG form.

• Must be accompanied by a cement verification report.

13. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

MIRU Leon Ross Drilling, Inc. Spudded surface hole at 10:00 a.m., 4/13/92. Drilled 12-1/4" hole to 274' KB. Ran 6 joints 8-5/8", 24#, K-55, ST&C casing and set at 274' KB. Cemented w/150 sx Type V cement plus additives.

RECEIVED

APR 20 1992

DIVISION OF
OIL GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name & Signature

(State Use Only)

Green Daniel Day
Green Daniel Day

Title Regulatory Analyst Date 4/15/92

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

ENTITY ACTION FORM - FORM 6

OPERATOR Coastal Oil & Gas Corporation

OPERATOR ACCT. NO. N 0230

ADDRESS P. O. Box 749

Denver, CO 80201-0749

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
B	2900	→	43-047-31971	NBU #124	NWNE	16	9S	21E	Uintah	4/13/92	4/13/92
WELL 1 COMMENTS: <i>Entities added 4-21-92 Jcp</i>											
B	2900	→	43-047-31974	NBU #123	NWNW	15	9S	21E	Uintah	4/9/92	4/9/92
WELL 2 COMMENTS:											
WELL 3 COMMENTS:											
WELL 4 COMMENTS:											
WELL 5 COMMENTS:											

ACTION CODES (See instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

(3/89)

RECEIVED

APR 20 1992

DIVISION OF
OIL GAS & MINING

Eileen Danni Dey
Signature Eileen Danni Dey

Regulatory Analyst 4/15/92
Title Date

Phone No. (303) 573-4476

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells.
Use APPLICATION FOR PERMIT for such proposals.

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other (specify)		6. Lease Designation and Serial Number State ML-3282
2. Name of Operator Coastal Oil & Gas Corporation		7. Indian Allottee or Tribe Name N/A
3. Address of Operator P. O. Box 749 Denver, CO 80201-0749		8. Unit or Communitization Agreement Natural Buttes Unit
4. Telephone Number (303) 573-4476		9. Well Name and Number NBU #124
5. Location of Well Footage : 435' FNL & 2295' FEL Q. Sec. T. R. M. : NW/NE Section 16, T9S-R21E		10. API Well Number 43-047-31971
County : Uintah State : UTAH		11. Field and Pool, or Wildcat Natural Buttes

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

NOTICE OF INTENT (Submit in Duplicate)

- | | |
|--|---|
| <input type="checkbox"/> Abandonment | <input type="checkbox"/> New Construction |
| <input type="checkbox"/> Casing Repair | <input type="checkbox"/> Pull or Alter Casing |
| <input type="checkbox"/> Change of Plans | <input type="checkbox"/> Recompletion |
| <input type="checkbox"/> Conversion to Injection | <input type="checkbox"/> Shoot or Acidize |
| <input type="checkbox"/> Fracture Treat | <input type="checkbox"/> Vent or Flare |
| <input type="checkbox"/> Multiple Completion | <input type="checkbox"/> Water Shut-Off |
| <input type="checkbox"/> Other | |

Approximate Date Work Will Start _____

SUBSEQUENT REPORT (Submit Original Form Only)

- | | |
|--|---|
| <input type="checkbox"/> Abandonment | <input type="checkbox"/> New Construction |
| <input type="checkbox"/> Casing Repair | <input type="checkbox"/> Pull or Alter Casing |
| <input type="checkbox"/> Change of Plans | <input type="checkbox"/> Shoot or Acidize |
| <input type="checkbox"/> Conversion to Injection | <input type="checkbox"/> Vent or Flare |
| <input type="checkbox"/> Fracture Treat | <input type="checkbox"/> Water Shut-Off |
| <input checked="" type="checkbox"/> Other | Report of Operations |

Date of Work Completion 5/3/92

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION AND LOG form.
Must be accompanied by a cement verification report.

13. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Please see the attached chronological history for the drilling operations performed on the above referenced well.

RECEIVED

MAY 06 1992

DIVISION OF
OIL GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name & Signature

(State Use Only)

Title Regulatory Analyst Date 5/5/92

COASTAL OIL & GAS CORPORATION
CHRONOLOGICAL HISTORY

NBU #124
NATURAL BUTTES UNIT
UINTAH COUNTY, UTAH
CHANDLER #1
WI: 100% COGC AFE: 13402
ATD: 6775' (WASATCH) SD: 4/26/92
CSG: 8-5/8" @ 274' KB
DHC(M\$): 168.0

4/15/92 WORT's. Spud well 4/13/92 at 10:00 a.m. w/Leon Ross Drlg. Drill 263' 12-1/4" hole. Ran 6 jts 8-5/8" 24# K-55 ST&C, 262.09'. KB 274', PBD 244'. Cmt w/Howco. 150 sx type 5 w/2% CaCl₂, 1/4#/sx Flocele. Displ w/15 bbls FW. Circ 8 bbls cmt to surf. No witness from BLM. CC: \$12,481.

4/26/92 300' Drlg 26'/½ hr. RU Chandler #1. NU 10PE. Test BOPE to 2000 psi, hydril to 1500 psi. Test csg leak-off of 1000 psi in 18 min. PU test plug and RIH. Test csg to 1500 psi, OK. LD test plug. PU bit and TIH. Install rot hd rbr. Tag cmt at 238'. Drill cmt and shoe. Drlg. Spudded well at 5:30 a.m., 4/26/92. Drlg w/air mist. 1400 CFM, 200 psi. CC: \$34,703.

4/27/92 2120' Drlg 1820'/22 hrs. Drlg, RS, chk BOP. Svys: 3/4 deg @ 304'; 1 deg @ 820'; 1 deg @ 1322'; 2 deg @ 1814'. Drlg w/air mist, 10-14 GPM, 800 CFM @ 350 psi. CC: \$56,564.

4/28/92 3675' Drlg 1555'/20 hrs. Drlg, RS and chk BOP. Trip for string float, svy & CO rot hd rbr. Svys: 1-1/4 deg @ 2338'; 2 deg @ 2849'; 1-3/4 deg @ 3342'. Retrieve string float. Drlg, retrieve string float. Unload hole and ream 15' to btm. Drlg w/air mist. 10-14 GPM, 1200 CFM @ 500 psi. CC: \$74,190.

4/29/92 4873' Drlg 1198'/21 hrs. Drlg, svy, RS and chk BOP. Drlg, change to aerated wtr at 3901'. Drlg, retrieve string float and svy: 1-3/4 deg @ 3839'; 2-1/4 deg @ 4316'; 2 deg @ 4800'. Drlg w/aerated wtr. 600 CFM. CC: \$89,103.

4/30/92 5690' Drlg 817'/18 hrs. Drlg, RS and chk BOP. Drlg, svy: 2 deg @ 5296'. TFNB, TIH. Wash 40' to btm, 12' of fill. Drlg w/aerated wtr. 800 CFM. CC: \$103,791.

5/1/92 6500' Drlg 810'/22.5 hrs. Drlg, RS and chk BOP. Drlg, svys: 2 deg @ 5881'; 1-3/4 deg @ 6368'. Drlg w/aerated wtr. 800 CFM. CC: \$120,782.

5/2/92 6775' Log open hole. 275'/8.5 hrs. Drlg, RS. Circ and cond for logs, short trip. Circ & cond for logs. TOH, SLM, no corr. RU Atlas WL, TD 6782'. Run DLL-GR-Cal-Neutron-Density. Drlg brks from 5751'-5762'; 6547'-6557'; 6595'-6603'. CC: \$131,671.

5/3/92 6775' RDRT's. Log open hole. TIH and LD DC's. TIH w/DP, LD DP. RU csg tools. RIH w/161 jts 5-1/2" 17# J-55 8rd LT&C csg, 6781.06'. Circ and wash 20' to btm. RU Howco, 30 bbls Superflush, 500 sx Hi-Fill w/1#/sx Capseal, 3% HR-7, 610 sxs 50-50 Poz, w/2% gel, 10% salt, .6% Hal 24, .2% CFR3, 1#/sx Capseal, 1/4#/sx Flocele. Displ w/156 bbls wtr. Circ 66 bbls cmt to pit. Set csg slips w/90,000#. ND BOPE, cut off csg. Rig released at 1:00 a.m., 5/3/92. CC: \$219,299. FINAL DRILLING REPORT.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE*

(See other in-
structions on
reverse side)

Form approved.
Budget Bureau No. 1004-0137
Expires August 31, 1985

WELL COMPLETION OR RECOMPLETION REPORT AND LOG *

1. TYPE OF WELL: OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> DRY <input type="checkbox"/> Other _____				5. LEASE DESIGNATION AND SERIAL NO. State ML-3282	
6. TYPE OF COMPLETION: NEW WELL <input checked="" type="checkbox"/> WORK OVER <input type="checkbox"/> DEEP-EN <input type="checkbox"/> PLUG BACK <input type="checkbox"/> DIFF. REMVR. <input type="checkbox"/> Other _____				6. IF INDIAN, ALLOTTEE OR TRIBE NAME Ute Tribal Surface	
2. NAME OF OPERATOR Coastal Oil & Gas Corporation				7. UNIT AGREEMENT NAME Natural Buttes Unit	
3. ADDRESS OF OPERATOR P.O. Box 749 Denver, CO 80201-0749 (303) 573-4476				8. FARM OR LEASE NAME NBU	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements) At surface 435' FNL & 2295' FEL At top prod. interval reported below Same as above. At total depth Same as above.				9. WELL NO. 124	
14. PERMIT NO. 43-047-31971				10. FIELD AND POOL, OR WILDCAT Natural Buttes	
15. DATE SPUDDED 4/13/92				11. SEC. T. R. M., OR BLOCK AND SURVEY ON AREA Section 16, T9S, R21E	
16. DATE T.D. REACHED 5/2/92				12. COUNTY OR PARISH Uintah	
17. DATE COMPL. (Ready to prod.) 8/27/92				13. STATE Utah	
18. ELEVATIONS (DT, KMB, RT, GR, ETC.) 4796' GR				19. ELEV. CASINGHEAD	
20. TOTAL DEPTH, MD & TVD 6775'		21. PLUG BACK T.D., MD & TVD 6724'		22. IF MULTIPLE COMPL., HOW MANY*	
23. INTERVALS DRILLED BY SFC-TD				24. ROTARY TOOLS CABLE TOOLS	
25. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)* 5630'-6609' Wasatch				26. WAS DIRECTIONAL SURVEY MADE No	
27. TYPE ELECTRIC AND OTHER LOGS RUN DLL/GR/Cal/Neutron/Density, CBL/CCL/GR 5-26-92				28. WAS WELL CORED No	
29. CASING RECORD (Report all strings set in well)					
CASING SIZE		WEIGHT, LB./FT.		DEPTH SET (MD)	
8-5/8"		24#		274'	
5-1/2"		17#		6770'	
HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED	
12-1/4"		150 sx Type V + add		None	
7-7/8"		1110 sx HiFill & 50/50 Poz		None	
30. LINER RECORD					
SIZE		TOP (MD)		BOTTOM (MD)	
2-3/8"		5586'		PACKER SET (MD)	
31. PERFORATION RECORD (Interval, size and number)					
Perf'd w/4" csg gun @ 1 JSPF @ following depths:					
5630'		5971'		6561'	
5637'		5979'		6604'	
5760'		6067'		6609'	
5765'		6557'		6609'	
32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.					
DEPTH INTERVAL (MD)		AMOUNT AND KIND OF MATERIAL USED			
5630'-6609'		47 bbls 15% HCL & 32 B.S.'s			
5630'-6609'		66,430 gals gel 3% KCL wtr w/ 30% CO ₂ & 132,000# 20/40 sand			
33. PRODUCTION					
DATE FIRST PRODUCTION 8/20/92		PRODUCTION METHOD (Flowing, gas lift, pumping—size and type of pump) Flowing			WELL STATUS (Producing or shut-in) SI
DATE OF TEST 8/27/92		HOURS TESTED 24		CHOKER SIZE 18/64"	
PROD'N. FOR TEST PERIOD		OIL—BSL. 0		GAS—MCF. 1300	
WATER—BSL. 0		OIL GRAVITY-API (CORR.) N/A			
FLOW. TUBING PRESS. 650		CASING PRESSURE 700		CALCULATED 24-HOUR RATE 0	
GAS—MCF. 1300		WATER—BSL. 0		OIL GRAVITY-API (CORR.) N/A	
34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.) SIWOPLC					
35. TEST WITNESSED BY P. Breshears					
36. LIST OF ATTACHMENTS Chronological history.					
37. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records					
SIGNED Eileen Danni Dev		TITLE Regulatory Analyst		DATE 9/25/92	

*(See Instructions and Spaces for Additional Data on Reverse Side)

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill-stem, tests, including depth interval tested, cushion used, flowing and shut-in pressures, and recoveries):	38. GEOLOGIC MARKERS			
FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME
				<div>MEAS. DEPTH</div> <div>TRUE VERT. DEPTH</div>
				<div>Wasatch</div> <div>5193'</div> <div>5193'</div>

THE COASTAL CORPORATION
PRODUCTION REPORT

CHRONOLOGICAL HISTORY

NBU #124
SECTION 16, T9S-R21E
NATURAL BUTTES UNIT
UINTAH COUNTY, UTAH
WI: 100% COGC AFE: 13402

PAGE 3

8/25/92 Flwg 1.1 MMCFD CO₂, FTP 850 psi, CP 1000 psi, 18/64" chk, 96 BWPD.
8/26/92 Flwg 1.0 MMCFD CO₂, FTP 775 psi, CP 775 psi, 18/64" chk, 20 BWPD.
8/27/92 Well SI. Flwg 1.3 MMCFD, FTP 650 psi, CP 700 psi, 18/64" chk. Dry
gas will burn. SI @ 6:30 a.m. Final report.

THE COASTAL CORPORATION
PRODUCTION REPORT

CHRONOLOGICAL HISTORY

PAGE 2

NBU #124
SECTION 16, T9S-R21E
NATURAL BUTTES UNIT
UINTAH COUNTY, UTAH
WI: 100% COGC AFE: 13402
TD: 6775' (WASATCH) SD: 4/26/92
CSG: 5-1/2" @ 6770'
PERFS: 5630'-6609'
CWC(M\$): 371.2

5/4/92 WOCU.
TC: \$219,299

5/7/92 WO completion. RU Pool Well Service. Swage out smashed 5-1/2" csg. Install tbg spool & list same, lay down bumper sub & jars. RD & MO.
DC: \$4,590 TC: \$223,889

5/19/92 WO completion. MIRU Cutters WLS. Ran CBL-CCL-GR log from LTD @ 6670' to sfc w/1000 psi on csg. Good bond. TOC @ sfc. Drop from report until further activity.
DC: \$3,450 TC: \$227,339

8/17/92 Finish RIH w/tbg & mill. MIRU Western Well Service. PU 4-3/4" mill & 100 jts 2-3/8" tbg, add 4.767" string mill & dress up csg in tbg spool. SDFN.
DC: \$38,800 TC: \$266,139

8/18/92 Perf & acid breakdown. No psi this a.m. Finish TIH w/tbg. PBTD @ 6724'. Circ csg w/150 bbls 3% KCl. Test csg 5000#, test OK. POOH w/tbg. SDFN.
DC: \$1,444 TC: \$267,583

8/19/92 Flwg back after acid breakdown. RU Cutters WLS. Perf 11 holes 5630'-6609' w/4" csg gun. RIH w/tbg to 6609'. RU Western. Spot 23 bbls 15% HCl across perfs. PU tbg to 5586'. ND BOP, NU WH. Breakdown perfs w/24 bbls 15% HCl + 32 BS's. Breakdown @ 2400 psi. Treat @ 7.5 BPM @ 4800 psi. Balled off to 5000 psi. Surge off balls. Finish flush. ISIP 1500 psi, 15 min 1400 psi. Flwd to pit 1-1/2 hr. Rec 53 BW. Made 10 swab runs, rec 63 BW (total 116 BW rec). Well kicked off. Flwd to pit on 20/64" chk overnight. Tbg - 176 jts landed @ 5586', notched collar on btm, SN 1-jt above & 10' blast jt on top. 234 BLTBR.
DC: \$9,430 TC: \$277,013

8/20/92 SI, WO frac. RDMO Western OWS rig #22. Flwg 500 MCFD, FTP 200 psi, CP 375 psi, 20/64" chk, dry gas. SI @ 6:00 a.m. Drop from report.
DC: \$200 TC: \$277,213

8/25/92 Flwg back after frac. Set & fill frac tanks & CO₂ vessels. MIRU Western Company. Frac perfs 5630'-6609' (11 holes) w/66,430 gal gel 3% KCl wtr w/30% CO₂ & 132,000# 20/40 sand as follows:

13,300 gal pad.
12,000 gal w/1 ppg sand.
12,000 gal w/2 ppg sand.
12,000 gal w/3 ppg sand.
6,000 gal w/4 ppg sand.
6,000 gal w/6 ppg sand.
5,130 gal flush.

AIR 35 BPM @ 2960 psi. ISIP 1200 psi, 15 min 1040 psi. RD Western. SI 2-hrs. Start flow back @ 11:30 a.m. on 18/64" chk. 1326 BLTBR.
DC: \$59,130 TC: \$336,343

COASTAL OIL & GAS CORPORATION
CHRONOLOGICAL HISTORY

NBU #124
NATURAL BUTTES UNIT
UINTAH COUNTY, UTAH
CHANDLER #1
WI: 100% COGC AFE: 13402
ATD: 6775' (WASATCH) SD: 4/26/92
CSG: 8-5/8" @ 274' KB
DHC(M\$): 168.0

4/15/92 WORT's. Spud well 4/13/92 at 10:00 a.m. w/Leon Ross Drlg. Drill 263' 12-1/4" hole. Ran 6 jts 8-5/8" 24# K-55 ST&C, 262.09'. KB 274', PBTD 244'. Cmt w/Howco. 150 sx type 5 w/2% CaCl₂, 1/4#/sx Flocele. Displ w/15 bbls FW. Circ 8 bbls cmt to surf. No witness from BLM. CC: \$12,481.

4/26/92 300' Drlg 26' 1/2 hr. RU Chandler #1. NU IOPE. Test BOPE to 2000 psi, hydril to 1500 psi. Test csg leak-off of 1000 psi in 18 min. PU test plug and RIH. Test csg to 1500 psi, OK. LD test plug. PU bit and TIH. Install rot hd rbr. Tag cmt at 238'. Drill cmt and shoe. Drlg. Spudded well at 5:30 a.m., 4/26/92. Drlg w/air mist. 1400 CFM, 200 psi. CC: \$34,703.

4/27/92 2120' Drlg 1820'/22 hrs. Drlg, RS, chk BOP. Svys: 3/4 deg @ 304'; 1 deg @ 820'; 1 deg @ 1322'; 2 deg @ 1814'. Drlg w/air mist, 10-14 GPM, 800 CFM @ 350 psi. CC: \$56,564.

4/28/92 3675' Drlg 1555'/20 hrs. Drlg, RS and chk BOP. Trip for string float, svy & CO rot hd rbr. Svys: 1-1/4 deg @ 2338'; 2 deg @ 2849'; 1-3/4 deg @ 3342'. Retrieve string float. Drlg, retrieve string float. Unload hole and ream 15' to btm. Drlg w/air mist. 10-14 GPM, 1200 CFM @ 500 psi. CC: \$74,190.

4/29/92 4873' Drlg 1198'/21 hrs. Drlg, svy, RS and chk BOP. Drlg, change to aerated wtr at 3901'. Drlg, retrieve string float and svy: 1-3/4 deg @ 3839'; 2-1/4 deg @ 4316'; 2 deg @ 4800'. Drlg w/aerated wtr. 600 CFM. CC: \$89,103.

4/30/92 5690' Drlg 817'/18 hrs. Drlg, RS and chk BOP. Drlg, svy: 2 deg @ 5296'. TFNB, TIH. Wash 40' to btm, 12' of fill. Drlg w/aerated wtr. 800 CFM. CC: \$103,791.

5/1/92 6500' Drlg 810'/22.5 hrs. Drlg, RS and chk BOP. Drlg, svys: 2 deg @ 5881'; 1-3/4 deg @ 6368'. Drlg w/aerated wtr. 800 CFM. CC: \$120,782.

5/2/92 6775' Log open hole. 275'/8.5 hrs. Drlg, RS. Circ and cond for logs, short trip. Circ & cond for logs. TOH, SLM, no corr. RU Atlas WL, TD 6782'. Run DLL-GR-Cal-Neutron-Density. Drlg brks from 5751'-5762'; 6547'-6557'; 6595'-6603'. CC: \$131,671.

5/3/92 6775' RDRT's. Log open hole. TIH and LD DC's. TIH w/DP, LD DP. RU csg tools. RIH w/161 jts 5-1/2" 17# J-55 8rd LT&C csg, 6781.06'. Circ and wash 20' to btm. RU Howco, 30 bbls Superflush, 500 sx Hi-Fill w/1#/sx Capseal, 3% HR-7, 610 sxs 50-50 Poz, w/2% gel, 10% salt, .6% Hal 24, .2% CFR3, 1#/sx Capseal, 1/4#/sx Flocele. Displ w/156 bbls wtr. Circ 66 bbls cmt to pit. Set csg slips w/90,000#. ND BOPE, cut off csg. Rig released at 1:00 a.m., 5/3/92. CC: \$219,299. FINAL DRILLING REPORT.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells; deepen existing wells; or to reenter plugged and abandoned wells.
Use APPLICATION FOR PERMIT for such proposals.

6. Lease Designation and Serial Number

State ML-3282

7. Indian Allottee or Tribe Name

N/A

8. Unit or Communitization Agreement

Natural Buttes Unit

9. Well Name and Number

NBU 124

10. API Well Number

43-047-31971

11. Field and Pool, or Wildcat

Natural Buttes

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other (specify)

2. Name of Operator
Coastal Oil & Gas Corporation

3. Address of Operator
P.O. Box 749 Denver, CO 80201-0749

4. Telephone Number
(303) 573-4476

5. Location of Well

Footage 435' ENL & 2295' FEL

CO. Sec. T. R. M. : NW/NE Section 16, T9S-R21E

County : Uintah

State : UTAH

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

NOTICE OF INTENT
(Submit in Duplicate)

- | | |
|--|---|
| <input type="checkbox"/> Abandonment | <input type="checkbox"/> New Construction |
| <input type="checkbox"/> Casing Repair | <input type="checkbox"/> Pull or Alter Casing |
| <input type="checkbox"/> Change of Plans | <input type="checkbox"/> Recompletion |
| <input type="checkbox"/> Conversion to Injection | <input type="checkbox"/> Shoot or Acidize |
| <input type="checkbox"/> Fracture Treat | <input type="checkbox"/> Vent or Flare |
| <input type="checkbox"/> Multiple Completion | <input type="checkbox"/> Water Shut-Off |
| <input type="checkbox"/> Other | |

Approximate Date Work Will Start

SUBSEQUENT REPORT
(Submit Original Form Only)

- | | |
|--|---|
| <input type="checkbox"/> Abandonment | <input type="checkbox"/> New Construction |
| <input type="checkbox"/> Casing Repair | <input type="checkbox"/> Pull or Alter Casing |
| <input type="checkbox"/> Change of Plans | <input type="checkbox"/> Shoot or Acidize |
| <input type="checkbox"/> Conversion to Injection | <input type="checkbox"/> Vent or Flare |
| <input type="checkbox"/> Fracture Treat | <input type="checkbox"/> Water Shut-Off |
| <input checked="" type="checkbox"/> Other | Report of 1st Sales |

Date of Work Completion

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION AND LOG form.
Must be accompanied by a cement verification report.

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

The above referenced well was connected to CIG's gas salesline and first sales occurred at 11: a.m., 12/3/92 with a rate of 1500 MCFPD, 0 BOPD, OBWPD, FTP 1859, SICP 1600, & 10/64" choke.

RECEIVED

JAN 11 1993

DIVISION OF
OIL, GAS AND MINING

I hereby certify that the foregoing is true and correct

Name & Signature

Date (Use Only)

Title Regulatory Analyst Date 1-7-93

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.

Use "APPLICATION FOR PERMIT -" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P.O. Box 749, Denver, CO 80201-0749

(303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

See attached spreadsheet

43-047-31971

FORM APPROVED

Budget Bureau No. 1004-0135

Expires: March 31, 1993

5. Lease Designation and Serial No.

See attached spreadsheet

6. If Indian, Allottee or Tribe Name

See attached spreadsheet

7. If Unit or CA, Agreement Designation

See attached spreadsheet

8. Well Name and No.

See attached spreadsheet

9. API Well No.

See attached spreadsheet

10. Field and Pool, or exploratory Area

See attached spreadsheet

11. County or Parish, State

Uintah Utah

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice


TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other _____
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☒ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

The operator requests permission to empty produced water into tanks on the listed locations. The produced water will then be transported by truck to the underground injection well, NBU #159, located at NE/SW Section 35, T9S-R21E.



14. I hereby certify that the foregoing is true and correct

Signed

Bonnie Carson

Title

Bonnie Carson

Sr. Environmental Analyst

Date 1/28/98

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

* See Instruction on Reverse Side

Well Name	API No.	Lease Designation & serial number	If Indian, Allottee or Tribe Name	Footages	Qtr/Qtr	Location	Field	County
NBU 83J	43-047-31235	U-01194-A-ST	N/A	1532' FSL & 1835' FWL	NESW	Sec. 27-9S-21E	Natural Buttes	Uintah
NBU 104	43-047-31957	ML-3282	Ute Surface	1181' FNL & 986' FEL	SENE	Sec. 16-9S-21E	Natural Buttes	Uintah
NBU 106	43-047-31946	UTU-0576	N/A	1980' FSL & 1980' FWL	NESW	Sec. 21-9S-21E	Natural Buttes	Uintah
NBU 110	43-047-31924	UTU-0576	N/A	637' FNL & 698' FEL	NENE	Sec. 28-9S-21E	Natural Buttes	Uintah
NBU 119	43-047-31927	UTU-01416A	N/A	603' FNL & 528' FEL	NENE	Sec. 15-10S-21E	Natural Buttes	Uintah
NBU 121Y	43-047-32086	UTU-01193	Ute Surface	819' FNL & 2163' FEL	NWNE	Sec. 13-9S-21E	Natural Buttes	Uintah
NBU 122	43-047-32303	U-01193	Ute Tribe	1047' FSL & 678' FEL	NESE	Sec. 13-9S-21E	Natural Buttes	Uintah
NBU 124	43-047-31971	ML-3282	Ute Tribe	435' FNL & 2295' FEL	NWNE	Sec. 16-9S-21E	Natural Buttes	Uintah
NBU 125	43-047-32350	U-0575	N/A	760' FEL & 620' FSL	SESE	Sec. 17-9S-21E	Natural Buttes	Uintah
NBU126	43-047-32349	U-0576	N/A	2200' FWL & 1600' FNL	SENE	Sec. 21-9S-21E	Natural Buttes	Uintah
NBU 127	43-047-31963	UTU-0576	Ute Tribe	2285' FNL & 741' FWL	SWNW	Sec. 21-9S-21E	Natural Buttes	Uintah
NBU 128	43-047-31964	UTU-0576	Ute Surface	996' FSL & 951' FWL	SWSW	Sec. 21-9S-21E	Natural Buttes	Uintah
NBU 129	43-047-31965	UTU-010950A	Ute Tribe	2055' FNL & 569' FEL	SENE	Sec. 22-9S-21E	Natural Buttes	Uintah
NBU 130	43-047-31967	UTU-0147566	N/A	2159' FNL & 828' FWL	SWNW	Sec. 22-9S-21E	Natural Buttes	Uintah
NBU 133	43-047-31978	ML-22582	N/A	469' FSL & 1740' FEL	SWSE	Sec. 35-9S-21E	Natural Buttes	Uintah
NBU 144	43-047-32022	ML-22651	N/A	1501' FNL & 1719' FEL	SWNE	Sec. 2-10S-22E	Natural Buttes	Uintah
NBU 145	43-047-31976	ST-U-01194A	N/A	661' FNL & 1440' FEL	NWNE	Sec. 27-9S-21E	Natural Buttes	Uintah
NBU 175	43-047-32143	U-0576	N/A	1902' FWL & 658' FNL	SWNW	Sec. 28-9S-21E	Natural Buttes	Uintah
NBU 176	43-047-32144	U-0576	N/A	2071' FNL & 604' FWL	SWNW	Sec. 28-9S-21E	Natural Buttes	Uintah
NBU 177	43-047-32112	UTU-0581	N/A	1855' FSL & 760' FEL	NESE	Sec. 29-9S-21E	Natural Buttes	Uintah
NBU 178	43-047-32121	UTU-0581	N/A	466' FNL & 1781' FEL	NWNE	Sec. 30-9S-21E	Natural Buttes	Uintah
NBU 181	43-047-32161	UTU-0576	Ute Tribe	503' FSL & 1849' FWL	SESW	Sec. 9-9S-21E	Natural Buttes	Uintah
NBU 183	43-047-32122	U-01194A	N/A	2014' FNL & 646' FWL	SWNW	Sec. 27-9S-21E	Natural Buttes	Uintah
NBU 184	43-047-32170	UTU-0463	N/A	541' FSL & 1778' FWL	SESW	Sec. 30-9S-22E	Natural Buttes	Uintah
NBU 191	43-047-32298	U-010950-A	N/A	694' FSL & 383' FWL	SWSW	Sec. 15-9S-21E	Natural Buttes	Uintah
NBU 192	43-047-32299	U-0147566	N/A	753' FNL & 2013' FWL	NENW	Sec. 22-9S-21E	Natural Buttes	Uintah
NBU 193	43-047-32300	U-010950-A	N/A	660' FSL & 660' FWL	SWSW	Sec. 22-9S-21E	Natural Buttes	Uintah
NBU 194	43-047-32296	U-010959-A	N/A	1765' FSL & 1709' FWL	NESW	Sec. 22-9S-21E	Natural Buttes	Uintah
NBU 195	43-047-32355	U-014137	N/A	700' FNL & 2000' FEL	NWNE	Sec. 11-9S-21E	Natural Buttes	Uintah
NBU 199	43-047-32337	U-0576-A	Ute Surface	369' FWL & 460' FSL	SWSW	Sec. 9-9S-21E	Natural Buttes	Uintah
NBU 202	43-047-32338	U-0149767	N/A	900' FNL & 600' FEL	NENE	Sec. 8-9S-21E	Natural Buttes	Uintah
NBU 214	43-047-32466	U-01194A-ST	N/A	1945' FSL & 600' FWL	NWSW	Sec. 27-9S-21E	Natural Buttes	Uintah
NBU 312-2E	43-047-32288	ML-21510	Ute Surface	1181' FSL & 1992' FEL	SWSE	Sec. 2-9S-21E	Natural Buttes	Uintah
NBU 36Y	43-047-30603	U-0581	N/A	1545' FNL & 1250' FEL	SENE	Sec. 30-9S-21E	Natural Buttes	Uintah
NBU 166	43-047-32065	UTU-0576	N/A	941' FSL & 1693' FEL	SWSE	Sec. 28-9S-21E	Natural Buttes	Uintah

Well Name	API No.	Lease Designation & serial number	If Indian, Allottee or Tribe Name	Footages	Qtr/Qtr	Location	Field	County
CIGE 19	43-047-30459	ML-3141-A	Ute Tribe	1231' FWL & 1223' FSL	SWSW	Sec. 16-9S-21E	Natural Buttes	Uintah
CIGE 22	43-047-30501	U-0144868	N/A	1980' FNL & 1980' FWL	SENE	Sec. 15-9S-20E	Natural Buttes	Uintah
CIGE 30	43-047-30498	U-01791	N/A	1307' FNL & 1419' FWL	SWSE	Sec. 6-10S-21E	Natural Buttes	Uintah
CIGE 37D	43-047-30910	U-0576	Ute Surface	1031' FSL & 1481' FEL	SWSE	Sec. 21-9S-21E	Natural Buttes	Uintah
CIGE 44	43-047-30527	U-01188	Ute Tribal	513' FSL & 503' FEL	SESE	Sec. 9-9S-21E	Natural Buttes	Uintah
CIGE 45	43-047-30528	U-01193	Ute Tribe	1019' FNL & 778' FEL	NENE	Sec. 15-9S-21E	Natural Buttes	Uintah
CIGE 60	43-047-30549	U-01193	Ute Surface	2156' FNL & 1813' FWL	SENE	Sec. 14-9S-21E	Natural Buttes	Uintah
CIGE 61	43-047-30580	U-01193	Ute Surface	1815' FNL & 1822' FWL	SENE	Sec. 13-9S-21E	Natural Buttes	Uintah
CIGE 71	43-047-30636	U-0575	Ute Surface	1894' FSL & 804' FEL	NESE	Sec. 20-9S-21E	Natural Buttes	Uintah
CIGE 78C	43-047-30870	U-38409	Ute Tribe	1279' FNL & 1477' FWL	NENW	Sec. 16-9S-21E	Natural Buttes	Uintah
CIGE 86D	43-047-30886	ML-3282	Ute Tribe	1080' FSL & 1558' FEL	SWSE	Sec. 16-9S-21E	Natural Buttes	Uintah
CIGE 99D	43-407-31223	U-01189-ST	N/A	760' FNL & 1980' FEL	NWNE	Sec. 26-9S-21E	Natural Buttes	Uintah
CIGE 110	43-047-31959	UTU-0575B	Ute Surface	553' FSL & 2016' FEL	SWSE	Sec. 7-9S-21E	Natural Buttes	Uintah
CIGE 111D	43-047-32305	U-01193	Ute Surface	1041' FSL & 2265' FWL	SESE	Sec. 13-9S-21E	Natural Buttes	Uintah
CIGE 112D	43-047-31945	UTU-0581	N/A	660' FSL & 660' FEL	SESE	Sec. 19-9S-20E	Natural Buttes	Uintah
CIGE 120	43-047-32251	UTU-0144868	Ute Tribe	883' FNL & 1142' FEL	NENE	Sec. 15-9S-20E	Natural Buttes	Uintah
CIGE 121	43-047-32252	UTU-0144868	N/A	1996' FNL & 1980' FEL	SWNE	Sec. 15-9S-20E	Natural Buttes	Uintah
CIGE 122	43-047-32098	UTU-0149767	Ute Surface	1064' FNL & 918' FEL	NENE	Sec. 7-9S-21E	Natural Buttes	Uintah
CIGE 125	43-047-32084	UTU-01193	Ute Surface	707' FNL & 635' FWL	NESW	Sec. 16-9S-21E	Natural Buttes	Uintah
CIGE 127	43-047-32036	ML-3141	Ute Tribe	2175' FSL & 2200' FWL	NESW	Sec. 16-9S-21E	Natural Buttes	Uintah
CIGE 142	43-047-31994	ML-01189	N/A	1461' FNL & 847' FEL	SENE	Sec. 25-9S-21E	Natural Buttes	Uintah
CIGE156	43-047-32195	ML-3282	Ute Tribe	1776' FSL & 611' FEL	NESE	Sec. 16-9S-21E	Natural Buttes	Uintah
CIGE157	43-047-32160	UTU-38409	N/A	2200' FNL & 700' FWL	SWNW	Sec. 16-9S-21E	Natural Buttes	Uintah
CIGE 158	43-047-32158	UTU-0576	N/A	1980' FSL & 660' FEL	NESE	Sec. 21-9S-21E	Natural Buttes	Uintah
CIGE 163	43-047-32192	UTU-01193	Ute	1678' FNL & 803' FEL	SENE	Sec. 15-9S-21E	Natural Buttes	Uintah
CIGE 170	43-047-32403	U-01193	Ute Surface	632' FWL & 1775' FNL	SWNE	Sec. 14-9S-21E	Natural Buttes	Uintah
CIGE 171	43-047-32348	U-01095-A	Ute Tribe	377' FSL & 2008' FEL	SWSE	Sec. 15-9S-21E	Natural Buttes	Uintah
COGC 2	43-047-30967	U-0577-B	Ute Surface	802' FNL & 1902' FWL	NENW	Sec. 22-9S-20E	Natural Buttes	Uintah
NBU 6	43-047-30083	U-0149076	Ute Surface	1434' FEL & 1356' FSL	NWSE	Sec. 24-9S-21E	Natural Buttes	Uintah
NBU 42	43-047-31735	U-463	N/A	2181' FNL & 1621' FWL	SENE	Sec. 30-9S-22E	Natural Buttes	Uintah
NBU 45N	43-047-30875	U-0144868-B	N/A	1555' FSL & 792' FWL	SWSW	Sec. 12-9S-20E	Natural Buttes	Uintah
NBU 48N3	43-047-30538	U-0359	Ute	1866' FNL & 382' FWL	SWNW	Sec. 18-9S-22E	Natural Buttes	Uintah
NBU 49V	43-047-31249	U-463	N/A	1161' FNL & 2017' FEL	NWNE	Sec. 30-9S-22E	Natural Buttes	Uintah
NBU 52J	43-047-30850	U-463	N/A	2122' FSL & 754' FWL	NWSW	Sec. 30-9S-22E	Natural Buttes	Uintah
NBU 57N	43-047-30867	U-01194ST	N/A	570' FNL & 1925' FWL	NENW	Sec. 27-9S-21E	Natural Buttes	Uintah
NBU 63N3	43-047-31097	U-14317	Ute Surface	1980' FNL & 660' FWL	SWNW	Sec. 12-9S-21E	Natural Buttes	Uintah
NBU 64N3	43-047-31098	U-0575-B	Ute Tribe	1975' FSL & 751' FEL	NESE	Sec. 8-9S-21E	Natural Buttes	Uintah
NBU 78	43-047-31762	U-463	N/A	1239' FNL & 625' FWL	NWNW	Sec. 30-9S-22E	Natural Buttes	Uintah

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.

Use "APPLICATION FOR PERMIT -" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P.O. Box 749, Denver, CO 80201-0749

(303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

435' FNL & 2295' FEL

NW NE Section 16, T9S-R21E

5. Lease Designation and Serial No.

State ML-3282

6. If Indian, Allottee or Tribe Name

Ute Tribal Surface

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

NBU 124

9. API Well No.

43-047-31971

10. Field and Pool, or exploratory Area

Natural Buttes

11. County or Parish, State

Uintah

Utah

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION


- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other lwr tbg. acdz and install
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

PLE

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Please see attached procedure for work to be performed on the subject well.



14. I hereby certify that the foregoing is true and correct

Signed

Bonnie Carson

Title

Bonnie Carson

Sr. Environmental Analyst

Date 2/18/98

(This space for Federal or State office use)

Approved by

R. R. Byrnes

Title

Associate Director
Utah DOGM

Date 2/26/98

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

* See Instruction on Reverse Side

NBU #124-16-9-21
NATURAL BUTTES FIELD
SECTION 16 T9S R21E
WORKOVER PROCEDURE *HWM*

WELL DATA

LOCATION: 435' FNL 2295' FEL SEC. 16 T9S R21E
ELEVATION: 4796' GR., 4807' KB.
TD: 6775', PBTD 6724' (1992)
CSG: 8-5/8", 24.0#, K-55 @ 274' w/ 150 SX.
5-1/2", 17.0#, J-55 @ 6770' w/ 1110 SX.
TBG: 2-3/8", 4.7#, J-55 @ 5586' (1992)
FORMATION(S): WASATCH 5630' - 6609', 11 HOLES (1992)

PROCEDURE

1. MI & RU pulling unit. Blow down & kill well w/ minimum amount of 2% KCL water. ND WH. NU BOP. Record BLTR.
2. RU slick line to tag PBTD (Bottom perf @ 6609'). **NOTE: Well has not workover since 1992, expect scale. CO if necessary.** TIH w/ 2-3/8" tbg to PBTD.
3. PU to 6609'. RU service company. Circulate 4 bbls 15% HCL acid with additives to EOT. Shut-in & spot acid across perf's 6557' - 6609'. PU to 6067'. Circulate 10 bbls 15% HCL acid w/ additives to EOT. Shut-in & spot acid across perf's 5630' - 6067' to clean up possible scale. RD service company. PU above perf's & wait 3 hrs for acid to soak. RIH & land 2-3/8" tbg @ 6609' (**new EOT**).
4. ND BOP. NU WH. RD & MO pulling unit. RU swab unit. Swab/flow back to clean up.
5. Complete installation of plunger lift equipment. Return the well to sales.

ML 3282

DOWNHOLE SCHEMATIC

LEASE: NRU
WELL #: 124
FIELD: NRU
LOCATION: _____
COUNTY/STATE: CLINTON, MS
TD: 6773
PBD: 6724
PERFS: 5670-6609
11 holes
PROD. FORM(S): _____
DATE: 7-29-93 BY: RLB

PRODUCING STATUS: Flowing
WELLHEAD WORKING PRESSURE: 5000

KB ELEVATION: 12
FORM, TOPS

ITEM, QUANTITY, DEPTHS, GRADE, WEIGHT, CPLG, Etc.	O.D.	I.D.
HOLE SIZE: <u>12 1/4</u> "		
SURFACE CASING: O.D. <u>2 1/2</u> ", WEIGHT(S) <u>24</u> # GRADE(S) _____, CPLG _____ SET AT <u>274</u> 'WI <u>150</u> SX		
HOLE SIZE: <u>7 7/8</u> "		
<u>5 1/2 17# 6770' 1110 SX</u>		
<u>2 3/8 4.7# 5586.</u>		
Washed 5630-6609, 1 SPF, 4" CG 5630 5740 5971 4067 6557 6609 5637 5765 5979 6561 6609		
<u>Break down w/ 47 PBL 1590 HCL 432 BS's</u> <u>two w/ 66, 430 gal 40# gal, 3290-24</u> <u>132000# 20/40</u>		

Form 3160-5
(June 1990)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.

Use "APPLICATION FOR PERMIT - " for such proposals

FORM APPROVED

Budget Bureau No. 1004-0135

Expires: March 31, 1993

5. Lease Designation and Serial No.

State ML-3282

6. If Indian, Allottee or Tribe Name

Ute Tribal Surface

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

NBU 124

9. API Well No.

43-047-31971

10. Field and Pool, or exploratory Area

Natural Buttes

11. County or Parish, State

Uintah

Utah

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well

☒ Gas Well

☐ Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P.O. Box 749, Denver, CO 80201-0749

(303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

435' FNL & 2295' FEL

NW NE Section 16, T9S-R21E

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐

Notice of Intent

☒

Subsequent Report

☐

Final Abandonment Notice

TYPE OF ACTION

☐

Abandonment

☐

Recompletion

☐

Plugging Back

☐

Casing Repair

☐

Altering Casing

☒

Other CO. acdz and install PLE

☐

Change of Plans

☐

New Construction

☐

Non-Routine Fracturing

☐

Water Shut-Off

☐

Conversion to Injection


☐

Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Please see attached chronological well history for work performed on the subject well.



14. I hereby certify that the foregoing is true and correct

Signed

Bonnie Carson

Title

Bonnie Carson

Sr. Environmental Analyst

Date

3/18/98

(This space for Federal or State Office Use)

Approved by

Conditions of approval, if any:

Title

Date

Oil, Gas & Mining

Title 18 U.S.C. Section 1001 makes it unlawful for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

By: *[Signature]*

See Instruction on Reverse Side

Clean Out, Acidize, Install PLE

- 2/26/98 **Prep to Acidize.** Delsco ran WLTD, tag fill @ 6452'. MI & RU Colo Well Serv Rig #26. Blow well down. ND WH, NU BOP. RU & RIH w/tbg. Tag fill @ 6657'. POOH above perfs. SDFN.
DC: \$3,600
CC: \$3,600
- 2/27/98 **Prep to Swab.** SITP 400 psi. SICP 400 psi. Blow well down & RIH w/tbg to 6607'. RU B-J Ser. Spot 4 bbls. 15% HCL across perfs 6667'-6609'. PU tbg to 6068'. Spot 10 bbls 15% HCL across perfs 5630'-6067'. RD B-J. RIH & land tbg @ 6598' (33 jts. Tbg added to string). ND BOP, NU WH. RDMO Colo Well Serv Rig # 25. MIRU Delsco swbg rig. SICP & SITP 0. Made 13 swb runs. Rec 70 BW, IFL 4500', FFL 5200', SICP 150 psi. Fluid Sli gas cut, no blow. SDFN.
DC: \$9,290
CC: \$12,890
- 2/28/98 **Swabbing on Well.** Delsco. ITP 0. ICP 425. IFL 4900. Made 15 runs, rec 60 bbls. FFL 5000. FTP 50. FCP 225. Gas cut. SIFN.
DC: \$1,574
CC: \$14,464
- 3/1/98 **Well Producing.** Delsco. ITP 200. ICP 450. IFL 5000. 15 bbls H2O. 4 runs. Trip plunger. Well on prod. Quit well. Moved to NBU 78C.
DC: \$830
CC: \$15,294
- 3/2/98 Flwg 102 MCF, 3 BW, FTP 88#, CP 255#, 64/64" ck, 24 hrs.
- 3/3/98 Flwg 131 MCF, 3 BW, FTP 157#, CP 190#, 64/64" ck, 24 hrs.
- 3/4/98 Flwg 128 MCF, 4 BW, FTP 120#, CP 193#, 64/64" ck, 24 hrs. Prior prod: Flwg 69 MCF, 0 BW, FTP 262#, CP 311#, 64/64" ck, 24 hrs. **Final Report.**

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL ☐ GAS WELL ☐ OTHER _____

2. NAME OF OPERATOR:
El Paso Production Oil & Gas Company

3. ADDRESS OF OPERATOR: 8 South 1200 East CITY Vernal STATE Utah ZIP 84078 PHONE NUMBER: 435-789-4433

4. LOCATION OF WELL

FOOTAGES AT SURFACE:

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:

5. LEASE DESIGNATION AND SERIAL NUMBER:

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

8. WELL NAME and NUMBER:

Exhibit "A"

9. API NUMBER:

10. FIELD AND POOL, OR WILDCAT:

COUNTY:

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA



TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: Name Change
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

As a result of the merger between The Coastal Corporation and a wholly owned subsidiary of El Paso Energy Corporation, the name of Coastal Oil & Gas Corporation has been changed to El Paso Production Oil & Gas Company effective March 9, 2001.

See Exhibit "A"

Bond # 400JU0708

Coastal Oil & Gas Corporation	
NAME (PLEASE PRINT) John T. Elzner	TITLE Vice President
SIGNATURE 	DATE 06-15-01
El Paso Production Oil & Gas Company	
NAME (PLEASE PRINT) John T. Elzner	TITLE Vice President
SIGNATURE 	DATE 06-15-01

(This space for State use only)

RECEIVED

JUN 19 2001

DIVISION OF
OIL, GAS AND MINING

State of Delaware
Office of the Secretary of State

PAGE 1

I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "COASTAL OIL & GAS CORPORATION", CHANGING ITS NAME FROM "COASTAL OIL & GAS CORPORATION" TO "EL PASO PRODUCTION OIL & GAS COMPANY", FILED IN THIS OFFICE ON THE NINTH DAY OF MARCH, A.D. 2001, AT 11 O'CLOCK A.M.

RECEIVED

MAR 1 2001

DIVISION OF
OIL, GAS AND MINING



Harriet Smith Windsor
Harriet Smith Windsor, Secretary of State

0610204 8100

AUTHENTICATION: 1061007

010162788

DATE: 04-03-01

CERTIFICATE OF AMENDMENT

OF

CERTIFICATE OF INCORPORATION

COASTAL OIL & GAS CORPORATION (the "Company"), a corporation organized and existing under and by virtue of the General Corporation Law of the State of Delaware, DOES HEREBY CERTIFY:

FIRST: That the Board of Directors of the Company, by the unanimous written consent of its members, filed with the minutes of the Board, adopted a resolution proposing and declaring advisable the following amendment to the Certificate of Incorporation of the Company:

RESOLVED that it is deemed advisable that the Certificate of Incorporation of this Company be amended, and that said Certificate of Incorporation be so amended, by changing the Article thereof numbered "FIRST." so that, as amended, said Article shall be and read as follows:

"FIRST. The name of the corporation is El Paso Production Oil & Gas Company."

SECOND: That in lieu of a meeting and vote of stockholders, the stockholders entitled to vote have given unanimous written consent to said amendment in accordance with the provisions of Section 228 of the General Corporation Law of the State of Delaware.

THIRD: That the aforesaid amendment was duly adopted in accordance with the applicable provisions of Sections 242 and 228 of the General Corporation Law of the State of Delaware.

IN WITNESS WHEREOF, said COASTAL OIL & GAS CORPORATION has caused this certificate to be signed on its behalf by a Vice President and attested by an Assistant Secretary, this 9th day of March 2001.

COASTAL OIL & GAS CORPORATION



David L. Siddall
Vice President

Attest:


Margaret E. Roark, Assistant Secretary

RECEIVED

STATE OF DELAWARE
SECRETARY OF STATE
DIVISION OF CORPORATIONS
FILED 11:00 AM 03/09/2001
010118394 - 0610204

JUN 19 2001

DIVISION OF
OIL, GAS AND MINING



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

RECEIVED

JUL 12 2001

DIVISION OF
OIL, GAS AND MINING

In Reply Refer To:
3106
UTSL-065841
(UT-924)

JUL 10 2001

NOTICE

El Paso Production Oil & Gas Company : Oil and Gas
Nine Greenway Plaza :
Houston TX 77046-0095 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Coastal Oil & Gas Corporation into El Paso Production Oil & Gas Company with El Paso Production Oil & Gas Company being the surviving entity.

For our purposes, the name change is recognized effective March 9, 2001.

The oil and gas lease files identified on the enclosed exhibit have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Coastal Oil & Gas Corporation to El Paso Production Oil & Gas Company. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Wyoming and Colorado.



Opolonia L. Abeyta
Acting Chief, Branch of
Minerals Adjudication

Enclosure

1. Exhibit of Leases (1 pp)

cc: Moab Field Office
Vernal Field Office
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217
~~State of Utah, DOGM,~~ Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114
Teresa Thompson (UT-922)
Joe Incardine (UT-921)

Exhibit of Leases

UTUSL-065841A	UTU-47172	UTU-74415	UTU-53860
UTU-28652	UTU-50687	UTU-74416	UTU-66401
UTU-37943	UTU-52298	UTU-75091	UTU-67868
UTU-44089	UTU-0109054	UTU-75096	UTU-65389
UTU-44090A	UTU-0143511	UTU-75097	UTU-77084
UTU-61263	UTU-0143512	UTU-75673	UTU-61430
UTU-00343	UTU-38401	UTU-76259	UTU-72633
UTU-02651	UTU-38411	UTU-76260	UTU-72650
UTU-02651B	UTU-38418	UTU-76261	UTU-49692
UTU-0142175	UTU-38419	UTU-76493	UTU-57894
UTU-70235	UTU-38420	UTU-76495	UTU-76829
UTU-70406	UTU-38421	UTU-76503	UTU-76830
UTU-74954	UTU-38423	UTU-78228	UTU-76831
UTU-75132	UTU-38424	UTU-78714	
UTU-75699	UTU-38425	UTU-78727	
UTU-76242	UTU-38426	UTU-78734	
UTU-78032	UTU-38427	UTU-79012	
UTU-4377	UTU-38428	UTU-79011	
UTU-4378	UTU-53861	UTU-71694	
UTU-7386	UTU-58097	UTU-00576	
UTU-8344A	UTU-64376	UTU-00647	
UTU-8345	UTU-65222	UTU-01470D	
UTU-8347	UTU-65223	UTU-0136484	
UTU-8621	UTU-66746	UTU-8344	
UTU-14646	UTU-67178	UTU-8346	
UTU-15855	UTU-67549	UTU-8648	
UTU-25880	UTU-72028	UTU-28212	
UTU-28213	UTU-72632	UTU-30289	
UTU-29535	UTU-73009	UTU-31260	
UTU-29797	UTU-73010	UTU-33433	
UTU-31736	UTU-73013	UTU-34711	
UTU-34350	UTU-73175	UTU-46699	
UTU-34705	UTU-73434	UTU-78852	
UTU-37116	UTU-73435	UTU-78853	
UTU-37355	UTU-73444	UTU-78854	
UTU-37573	UTU-73450	UTU-075939	
UTU-38261	UTU-73900	UTU-0149767	
UTU-39223	UTU-74409	UTU-2078	
UTU-40729	UTU-74410	UTU-44426	
UTU-40736	UTU-74413	UTU-49530	
UTU-42469	UTU-74414	UTU-51026	

OPERATOR CHANGE WORKSHEET**ROUTING**

1. GLH		4-KAS
2. CDW	✓	5-LP ✓
3. JLT		6-FILE

Enter date after each listed item is completed

Change of Operator (Well Sold)

Designation of Agent

Operator Name Change (Only)

X **Merger**The operator of the well(s) listed below has changed, effective: **3-09-2001**

FROM: (Old Operator):
COASTAL OIL & GAS CORPORATION
Address: 9 GREENWAY PLAZA STE 2721
HOUSTON, TX 77046-0995
Phone: 1-(713)-418-4635
Account N0230

TO: (New Operator):
EL PASO PRODUCTION OIL & GAS COMPANY
Address: 9 GREENWAY PLAZA STE 2721 RM 2975B
HOUSTON, TX 77046-0995
Phone: 1-(832)-676-4721
Account N1845

CA No.**Unit: NATURAL BUTTES****WELL(S)**

NAME	API NO	ENTITY NO	SEC TWN RNG	LEASE TYPE	WELL TYPE	WELL STATUS
NBU 216	43-047-32487	2900	15-09S-21E	FEDERAL	GW	P
CIGE 216-15-9-21	43-047-32920	2900	15-09S-21E	FEDERAL	GW	P
NBU 298	43-047-33041	2900	15-09S-21E	FEDERAL	GW	P
CIGE 215X	43-047-33690	2900	15-09S-21E	FEDERAL	GW	P
CIGE 237	43-047-33878	99999	15-09S-21E	FEDERAL	GW	APD
NBU CIGE 45-15-9-21	43-047-30528	2900	15-09S-21E	FEDERAL	GW	P
NBU CIGE 78C-16-9-21	43-047-30870	2900	16-09S-21E	FEDERAL	GW	P
NBU 124	43-047-31971	2900	16-09S-21E	FEDERAL	GW	P
CIGE 157-16-9-21	43-047-32160	2900	16-09S-21E	FEDERAL	GW	P
CIGE 200-16-9-21	43-047-32802	2900	16-09S-21E	FEDERAL	GW	P
NBU 34-17B	43-047-30404	2900	17-09S-21E	FEDERAL	GW	S
NBU 105	43-047-32302	2900	17-09S-21E	FEDERAL	GW	P
NBU 125	43-047-32350	2900	17-09S-21E	FEDERAL	GW	P
NBU 316-17E	43-047-32381	2900	17-09S-21E	FEDERAL	GW	P
NBU 228	43-047-32636	2900	17-09S-21E	FEDERAL	GW	P
NBU 254	43-047-32803	2900	17-09S-21E	FEDERAL	GW	P
NBU 30-18B	43-047-30380	2900	18-09S-21E	FEDERAL	GW	P
CIGE 72-18-9-21	43-047-30634	2900	18-09S-21E	FEDERAL	GW	P
CIGE 129-18-9-21	43-047-32043	2900	18-09S-21E	FEDERAL	GW	P
NBU 304-18E	43-047-32130	2900	18-09S-21E	FEDERAL	GW	P

OPERATOR CHANGES DOCUMENTATION

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 06/19/2001
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 06/19/2001
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 06/21/2001
4. Is the new operator registered in the State of Utah: YES Business Number: 608186-0143

5. If **NO**, the operator was contacted contacted on: N/A
6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the (merger, name change, or operator change for all wells listed on Federal or Indian leases on: 07/10/2001
7. **Federal and Indian Units:** The BLM or BIA has approved the successor of unit operator for wells listed on: 07/10/2001
8. **Federal and Indian Communization Agreements ("CA"):** The BLM or the BIA has approved the operator change for all wells listed involved in a CA on: 07/10/2001
9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 07/30/2001
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 07/30/2001
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

STATE BOND VERIFICATION:

1. State well(s) covered by Bond No.: N/A

FEDERAL BOND VERIFICATION:

1. Federal well(s) covered by Bond No.: WY 2793

FEE WELLS - BOND VERIFICATION/LEASE INTEREST OWNER NOTIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond No: N/A
2. The **FORMER** operator has requested a release of liability from their bond on: N/A
The Division sent response by letter on: N/A
3. (R649-2-10) The **FORMER** operator of the Fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: _____

FILMING:

1. All attachments to this form have been **MICROFILMED** on: _____

FILING:

1. **ORIGINALS/COPIES** of all attachments pertaining to each individual well have been filled in each well file on: _____

COMMENTS: Master list of all wells involved in operator change from Coastal Oil & Gas Corporation to El Paso Production Oil and Gas Company shall be retained in the "Operator Change File".

JAN. 17. 2003 3:34PM

WESTPORT

NO. 173 P. 2

**WESTPORT OIL AND GAS COMPANY, L.P.**

410 Seventeenth Street #2300 Denver Colorado 80202-4436
Telephone: 303 573 5404 Fax: 303 573 5609

February 1, 2002

Department of the Interior
Bureau of Land Management
2850 Youngfield Street
Lakewood, CO 80215-7093
Attention: Ms. Martha Maxwell

**RE: BLM Bond CO-1203
BLM Nationwide Bond 158626364
Surety - Continental Casualty Company
Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Conversion of Westport Oil and Gas Company, Inc., into Westport Oil and Gas Company, L.P.
Assumption Rider - Westport Oil and Gas Company, L.P.**

Dear Ms. Maxwell:

Pursuant to our recent conversations, please find the following list of enclosures for the BLM's consideration and approval:

Two (2) Assumption Riders, fully executed originals.
Copies of Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Copies of Westport Oil and Gas Company, Inc., conversion into Westport Oil and Gas Company, L.P.
List of all Federal/BIA/State Leases - Belco/Westport's leases - in all states.

Please inform us of any additional information needed to complete the change to Westport Oil and Gas Company, L.P., as operator of record.

I thank you for your assistance and cooperation in this matter. Please do not hesitate contacting the undersigned, should a question arise.

Sincerely,
Westport Oil and Gas Company, L.P.

Debby J. Black
Engineer Technician

Encl:



United States Department of the Interior **RECEIVED**

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

FEB 22 2002

DIVISION OF
OIL, GAS AND MINING

In Reply Refer To:

3106

UTU-25566 et al

(UT-924)

FEB 21 2002

NOTICE

Westport Oil and Gas Company L.P. : Oil and Gas
410 Seventeenth Street, #2300 :
Denver Colorado 80215-7093 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Westport Oil and Gas Company, Inc. into Westport Oil and Gas Company, L.P. with Westport Oil and Gas Company, L.P. being the surviving entity.


For our purposes, the name change is recognized effective December 31, 2001.

The oil and gas lease files identified have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Westport Oil and Gas Company, Inc. to Westport Oil and Gas Company, L.P.. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Colorado.

UTU-03405
UTU-20895
UTU-25566
UTU-43156
UTU-49518
UTU-49519
UTU-49522
UTU-49523



Robert Lopez
Chief, Branch of
Minerals Adjudication

cc: Moab Field Office
Vernal Field Office
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217
State of Utah, DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114
Teresa Thompson (UT-922)
Joe Incardine (UT-921)

memorandum

Branch of Real Estate Services
Uintah & Ouray Agency

Date: 5 December, 2002

Reply to
Attn of: Supervisory Petroleum Engineer

Subject: Modification of Utah Division of Oil, Gas and Mining Regulations

To: Director, Utah Division of Oil, Gas and Mining Division: John Baza

We have been advised of changes occurring with the operation of your database for Change of Operator. You will be modifying your records to reflect Change of Operator once you have received all necessary documentation from the companies involved, and perhaps in advance of our Notice of Concurrence/Approval of Change of Operator where Indian leases are involved.


We have no objection.

With further comment to Rulemaking, I wish to comment concerning the provision of Exhibits for upcoming Hearings. I would like to see the Uintah & Ouray Agency, BIA, and the Ute Indian Tribe, Energy & Mineral Resources Department added to the list of those parties that receive advance Exhibits so as to allow us to have research time prior to Hearing dates. We will be able to provide a more informed recommendation to the Oil, Gas and Mining Board. It would be best if we would receive only those Exhibits that concern Indian lands, specifically on or adjacent to Indian lands. This may be a difficult situation to attain, as it is not always clear where 'on or adjacent' occurs.

I am aware that you have gone to extra effort to correct this matter already, and I fully appreciate it. My request is intended only to allow the addition of Uintah & Ouray Agency and Ute Indian Tribe to the official listing.

We appreciate your concern, and hope that these comments are timely enough for consideration in the revision process.

CC: Minerals & Mining Section of RES
Ute Energy & Mineral Resources Department: Executive Director
chronos





IN REPLY REFER TO:
Real Estate Services

United States Department of the Interior

BUREAU OF INDIAN AFFAIRS

Washington, D.C. 20240

FEB 10 2003

Carroll A. Wilson
Principal Landman
Westport Oil and Gas Company, L.P.
1368 South 1200 East
Vernal, Utah 84078

Dear Mr. Wilson:

This is in response to your request for approval of RLI Insurance Company's Nationwide Oil and Gas Lease Bond No. RLB0005239 executed effective December 17, 2002, (\$150,000 coverage) with Westport Oil and Gas Company, L. P., as principal.

This bond is hereby approved as of the date of this correspondence and will be retained in the Bureau of Indian Affairs' Division of Real Estate Services, 1849 C Street, NW, MS-4512-MIB, Washington, D.C. 20240. All Bureau oil and gas regional offices and the surety are being informed of this action.

In cases where you have existing individual and/or collective bonds on file with one or more of our regional offices, you may now request those offices, directly, to terminate in lieu of coverage under this Nationwide Bond.

Enclosed is a copy of the approved bond for your files. If we may be of further assistance in this matter, please advise.

Sincerely,

A handwritten signature in cursive script, reading "Perry E. Brown", is written over a horizontal line.

ACTING

Director, Office of Trust Responsibilities

Enclosure



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

IN REPLY REFER TO
UT-922

February 27, 2003

Westport Oil and Gas Company, L.P.
Attn: Gary D. Williamson
1670 Broadway, Suite 2800
Denver, Colorado 80202

Re: Natural Buttes Unit
Uintah County, Utah

Gentlemen:

On February 27, 2003, we received an indenture dated December 17, 2002, whereby El Paso Production Oil & Gas Company resigned as Unit Operator and Westport Oil and Gas Company, L.P., was designated as Successor Unit Operator for the Natural Buttes Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective February 27, 2003. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the Natural Buttes Unit Agreement.

Your nationwide (Colorado) oil and gas bond No. 1203 will be used to cover all operations within the Natural Buttes Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Robert A. Henricks

Robert A. Henricks
Chief, Branch of Fluid Minerals

Enclosure

bcc: Field Manager - Vernal (w/enclosure)
SITLA
Division of Oil, Gas & Mining
Minerals Adjudication Group
File - Natural Buttes Unit (w/enclosure)
Agr. Sec. Chron
Fluid Chron

UT922:TAThompson:tt:02/27/2003

RECEIVED

FEB 28 2003

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

8. WELL NAME and NUMBER:

Exhibit "A"

9. API NUMBER:

10. FIELD AND POOL, OR WILDCAT:

1. TYPE OF WELL

OIL WELL ☐

GAS WELL ☐

OTHER

2. NAME OF OPERATOR:

El Paso Production Oil & Gas Company

3. ADDRESS OF OPERATOR:

9 Greenway Plaza

City Houston

STATE TX

ZIP 77064-0995

PHONE NUMBER:

(832) 676-5933

4. LOCATION OF WELL

FOOTAGES AT SURFACE:

COUNTY:

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Operator change to Westport Oil and Gas Company, L.P., 1670 Broadway, Suite 2800, Denver, CO. 80202-4800, effective December 17, 2002.

BOND # _____

State Surety Bond No. RLB0005236
Fee Bond No. RLB0005238

EL PASO PRODUCTION OIL & GAS COMPANY

By: _____

Jon R. Nelsen, Attorney-in-Fact

RECEIVED

FEB 28 2003

DIV. OF OIL, GAS & MINING

WESTPORT OIL AND GAS COMPANY, L.P.

NAME (PLEASE PRINT)

David R. Dix

TITLE Agent and Attorney-in-Fact

SIGNATURE

DATE

12/17/02

(This space for State use only)

Form 3160-5
(August 1999)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

5. Lease Serial No.

SEE ATTACHED EXHIBIT "A"

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

SEE ATTACHED EXHIBIT "A"

9. API Well No.

SEE ATTACHED EXHIBIT "A"

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

WESTPORT OIL & GAS COMPANY, L.P.

3a. Address

P.O. BOX 1148 VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7023

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED EXHIBIT "A"

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	SUCCESSOR OF
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zone. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed when testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator determined that the site is ready for final inspection.

WESTPORT OIL & GAS COMPANY, L.P., IS CONSIDERED TO BE THE OPERATOR ON THE ATTACHED DESCRIBED LANDS AND IS RESPONSIBLE UNDER THE TERMS AND CONDITIONS OF THE LEASE FOR THE OPERATIONS CONDUCTED ON THE LEASED LANDS OR PORTIONS THEREOF, BOND COVERAGE FOR THIS WELL IS PROVIDED BY FEDERAL NATIONWIDE BOND NO. 158626364, EFFECTIVE FEBRUARY 1, 2002, AND BIA NATIONWIDE BOND NO. RLB0005239, EFFECTIVE FEBRUARY 10, 2003.

RECEIVED

MAR 04 2003

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

CHERYL CAMERON

Title

OPERATIONS

Signature

Date

March 4, 2003

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

OPERATOR CHANGE WORKSHEET

ROUTING

1. GLH

2. CDW ✓

3. FILE

X Change of Operator (Well Sold)

Designation of Agent/Operator

Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective: **12-17-02****FROM: (Old Operator):**

EL PASO PRODUCTION OIL & GAS COMPANY

Address: 9 GREENWAY PLAZA

HOUSTON, TX 77064-0995

Phone: 1-(832)-676-5933

Account No. N1845

TO: (New Operator):

WESTPORT OIL & GAS COMPANY LP

Address: P O BOX 1148

VERNAL, UT 84078

Phone: 1-(435)-781-7023

Account No. N2115

CA No.

Unit:

NATURAL BUTTES

WELL(S)

NAME	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
NBU 299	16-09S-21E	43-047-33012	2900	STATE	GW	P
CIGE 180-16-9-21	16-09S-21E	43-047-32478	2900	STATE	GW	P
CIGE 156-16-9-21	16-09S-21E	43-047-32195	2900	STATE	GW	P
CIGE 157-16-9-21	16-09S-21E	43-047-32160	2900	FEDERAL	GW	P
NBU CIGE 19-16-9-21	16-09S-21E	43-047-30459	2900	STATE	GW	P
NBU CIGE 78C-16-9-21	16-09S-21E	43-047-30870	2900	FEDERAL	GW	P
NBU CIGE 86D-16-9-21	16-09S-21E	43-047-30886	2900	STATE	GW	P
NBU 124	16-09S-21E	43-047-31971	2900	FEDERAL	GW	P
NBU 104	16-09S-21E	43-047-31957	2900	STATE	GW	P
CIGE 127-16-9-21	16-09S-21E	43-047-32036	2900	STATE	GW	P
CIGE 200-16-9-21	16-09S-21E	43-047-32802	2900	FEDERAL	GW	P
NBU 228	17-09S-21E	43-047-32636	2900	FEDERAL	GW	P
NBU 316-17E	17-09S-21E	43-047-32381	2900	FEDERAL	GW	P
NBU 125	17-09S-21E	43-047-32350	2900	FEDERAL	GW	P
NBU 254	17-09S-21E	43-047-32803	2900	FEDERAL	GW	P
NBU 105	17-09S-21E	43-047-32302	2900	FEDERAL	GW	P
NBU 370	17-09S-21E	43-047-34672	99999	FEDERAL	GW	APD
CIGE 72-18-9-21	18-09S-21E	43-047-30634	2900	FEDERAL	GW	P
CIGE 201-18-9-21	18-09S-21E	43-047-32804	2900	FEDERAL	GW	P
NBU 30-18B	18-09S-21E	43-047-30380	2900	FEDERAL	GW	P

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 02/28/2003
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 03/04/2003
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 03/06/2003
4. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
5. If **NO**, the operator was contacted contacted on: _____

6. (R649-9-2)Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM-12/31/2003 BIA-12/5/02

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 02/27/2003

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: N/A

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 03/11/2003
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 03/11/2003
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

STATE WELL(S) BOND VERIFICATION:

1. State well(s) covered by Bond Number: RLB 0005236

FEDERAL WELL(S) BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: 158626364

INDIAN WELL(S) BOND VERIFICATION:

1. Indian well(s) covered by Bond Number: RLB 0005239

FEE WELL(S) BOND VERIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB 0005238
2. The **FORMER** operator has requested a release of liability from their bond on: N/A
The Division sent response by letter on: N/A

LEASE INTEREST OWNER NOTIFICATION:

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

WESTPORT OIL & GAS COMPANY, L.P.

3a. Address

P.O. BOX 1148 VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Multiple Wells - see attached

5. Lease Serial No.

Multiple Wells - see attached

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

891008900A

8. Well Name and No.

Multiple Wells - see attached

9. API Well No.

Multiple Wells - see attached

10. Field and Pool, or Exploratory Area

Natural Buttes Unit

11. County or Parish, State

Uintah County, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

Westport Oil & Gas requests a variance to Onshore Order No. 4, Part IIIC.a. requiring each sales tank be equipped with a pressure-vacuum thief hatch and/or vent line valve. The variance is requested as an economic analysis shows the value of the shrunk condensate will not payout the incremental cost of purchasing and maintaining the valve resulting in a loss of value over the producing life of the well.

The volume lost to shrinkage by dropping the tank pressure from 6 ozs. to 0 psig is shown to be 0.3% of the tank volume. This was determined by lab analysis of a representative sample from the field. The sample shrunk from 98.82% of original volume to 98.52% when the pressure was dropped.

The average NBU well produces approximately 6 bbls condensate per month. The resulting shrinkage would amount to 0.56 bbls per month lost volume due to shrinkage. The value of the shrunk and lost condensate does not recoup or payout the cost of installing and maintaining the valves and other devices that hold the positive tank pressure. An economic run based on the loss and costs is attached.

Westport Oil & gas requests approval of this variance in order to increase the value of the well to the operator and the mineral royalty owners.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

J.T. Conley

Signature

J.T. Conley

COPY SENT TO OPERATOR

Date:

Initials:

CHD

Title

Date:

Initials:

CHD

Operations Manager

9-2-2003

SEP 10 2003

DIV. OF OIL & GAS

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Accepted by the
Utah Division of
Oil, Gas and Mining

Federal Approval of This
Action Is Necessary

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Date:

9/16/03

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

NBU 078	30-9-22 NWNW	U463	891008900A	430473176200S1
NBU 080V	34-9-22 NWSW	UTU0149077	891008900A	430473124000S1
NBU 081V	35-9-22 SWNW	U01194	891008900A	430473123200S1 ✓
NBU 083J	27-9-21 NESW	U01194A	891008900A	430473123500S1 ✓
NBU 084V	6-10-22 NWNE	UTU01195B	891008900A	430473124500S1
NBU 085J	4-10-22 SWNW	UTU01191A	891008900A	430473124600S1
NBU 086J	3-10-22 NENE	UTU01191A	891008900A	430473125100S1
NBU 087J	3-10-22 NESW	UTU01191	891008900A	430473125000S1
NBU 088V	26-9-21 NENE	U01194	891008900A	430473123300S1 ✓
NBU 093	33-9-22 NESE	UTU01191A	891008900A	430473175300S1
NBU 097	25-9-21 NENW	U01189	891008900A	430473174400S1 ✓
NBU 098V	34-9-21 SWSW	U01194A	891008900A	430473132700S1 ✓
NBU 099	25-9-21 SWSW	U01194	891008900A	430473174500S1 ✓
NBU 101	3-10-21 NWSE	UTU0149078	891008900A	430473175500S1
NBU 102	5-10-21 SESW	UTU01393D	891008900A	430473175700S1
NBU 1021-16G	16-10-21 SWNE	ML10755	891008900A	430473511100S1 ✓
NBU 1021-20	2-10-21 SWSE	ML13826	891008900A	430473511000S1 ✓
NBU 103	10-9-21 SENW	U0141315	891008900A	430473195600S1
NBU 104	16-9-21 SENE	ML3282	891008900A	430473195700S1
NBU 105	17-9-21 SWSW	UTU0575	891008900A	430473230200S1
NBU 106	21-9-21 NESW	UTU0576	891008900A	430473194600S1
NBU 107	26-9-21 SENW	U01194	891008900A	430473191600S1
NBU 108	19-9-22 SESE	UTU0284	891008900A	430473195800S1
NBU 109	27-9-21 SENE	U01194A	891008900A	430473191700S1 ✓
NBU 110	28-9-21 NENE	U05676	891008900A	430473192400S1
NBU 111	25-9-21 SWNW	U01194	891008900A	430473192000S1 ✓
NBU 112	33-9-22 SESE	UTU01191	891008900A	430473193000S1
NBU 113	34-9-22 SESE	UTU0149077	891008900A	430473193100S1
NBU 114	5-10-21 SWSW	UTU01393D	891008900A	430473192300S1
NBU 115	10-10-21 NENW	UTU0149079	891008900A	430473192900S1
NBU 116	6-10-22 NWNW	UTU464	891008900A	430473192500S1
NBU 117	10-10-22 NENE	U01197A	891008900A	430473191400S1
NBU 118	22-9-20 SENE	UTU0577B	891008900A	430473196900S1
NBU 119	22-9-20 SENW	UTU0577B	891008900A	430473197300S1
NBU 120	10-9-21 NWNW	U0141315	891008900A	430473197200S1
NBU 121	13-9-21 NWNE	U01193	891008900A	430473208600S1
NBU 122	13-9-21 SESE	U01193	891008900A	430473230300S1
NBU 123	15-9-21 NWNW	UTU01188	891008900A	430473197400S1
NBU 124	16-9-21 NWNE	ML3282	891008900A	430473197100S1
NBU 125	17-9-21 SESE	UTU0575	891008900A	430473235000S1
NBU 126	21-9-21 SENW	UTU0576	891008900A	430473234900S1
NBU 127	21-9-21 SWNW	UTU0576	891008900A	430473196300S1
NBU 128	21-9-21 SWSW	UTU0576	891008900A	430473196400S1
NBU 129	22-9-21 SENE	UTU010950A	891008900A	430473196500S1
NBU 130	22-9-21 SWNW	UTU0147566	891008900A	430473196700S1
NBU 131	23-9-21 NWSW	UTU0149075	891008900A	430473196600S1
NBU 132	26-9-21 NWNW	U01194	891008900A	430473193800S1 ✓
NBU 133	28-9-21 SWNE	U05676	891008900A	430473195000S1
NBU 134	28-9-21 SWSW	U05676	891008900A	430473201100S1
NBU 136	19-9-22 SWSE	UTU0284	891008900A	430473196800S1
NBU 137	30-9-22 SESE	ML22935	891008900A	430473193900S1 ✓
NBU 138A	33-9-22 SENE	UTU01191A	891008900A	430473215100S1
NBU 139	14-10-21 SWNE	UTU465	891008900A	430473194800S1
NBU 140	5-10-22 NWNE	UTU01191A	891008900A	430473194700S1
NBU 141	6-10-22 SENW	UTU464	891008900A	430473201700S1
NBU 142	10-10-22 NESE	UTU025187	891008900A	430473201300S1
NBU 143	10-9-21 SWNE	U0141315	891008900A	430473229700S1
NBU 144	23-9-21 NWNW	UTU0149075	891008900A	430473204400S1
NBU 145	27-9-21 NWNE	U01194A	891008900A	430473197600S1 ✓
NBU 146	14-10-21 SWNW	UTU465	891008900A	430473198500S1
NBU 147	4-10-22 NWSW	UTU01191	891008900A	430473198400S1
NBU 148	4-10-22 SESW	UTU01191	891008900A	430473198300S1

Westport Oil & Gas, L.P.

Project Economics Worksheet

Instructions:

Fill in blue boxes with before and after project data. The evaluation results are shown below and graphed automatically at the bottom of the page. This sheet is protected to prevent accidental alteration of the formulas. See JTC for changes. OPX entered as annual costs and/or as unit OPX costs for \$/BF and \$/MCF

Project Name:

Condensate Shrinkage Economics

Is this job a well pull or production rig job ??? ☐ N (Y or N)

	BEFORE \$/Year	AFTER \$/Year	DIFFERENCE \$/Year
Gross Oil Revenue	\$1,088	\$1,099	\$11
Gross Gas Revenue	\$0	\$0	\$0
NGL Revenue	\$0	\$0	\$0
PULING UNIT SERVICE			\$0
WIRELINE SERVICE			\$0
SUBSURF EQUIP REPAIRS			\$0
COMPANY LABOR			\$0
CONTRACT LABOR	\$0	\$200	\$200
CONTR SERVICE			\$0
LEASE FUEL GAS	\$0	\$0	\$0
UTILITIES - ELECTRICITY	\$0	\$0	\$0
CHEMICAL TREATING			\$0
MATERIAL & SUPPLY	\$0	\$150	\$150
WATER & HAULING			\$0
ADMINISTRATIVE COSTS			\$0
GAS PLANT PROCESSING			\$0
Totals	\$0	\$350	\$350

Increased OPX Per Year

Investment Breakdown:

	Cap/Exp Code	Cost, \$
Capital \$	820/830/840	\$1,200
Expense \$	830/860	\$0
Total \$		\$1,200

Oil Price	\$ 23.00	\$/BO
Gas Price	\$ 3.10	\$/MCF
Electric Cost	\$ -	\$/ HP / day
OPX/BF	\$ 2.00	\$/BF
OPX/MCF	\$ 0.62	\$/MCF

Production & OPX Detail:

	Before		After		Difference
Oil Production	0.192	BOPD	0.194	BOPD	0.002
Gas Production	0	MCFPD	0	MCFPD	0
Wtr Production	0	BWPD	0	BWPD	0
Horse Power		HP		HP	0
Fuel Gas Burned		MCFPD		MCFPD	0

Project Life:

Life = 20.0 Years
(Life no longer than 20 years)

Internal Rate of Return:

After Tax IROR = #DIV/0!

AT Cum Cashflow:

Operating Cashflow = (\$2,917) (Discounted @ 10%)

Payout Calculation:

Payout = $\frac{\text{Total Investment}}{\text{Sum(OPX + Incremental Revenue)}}$ = 1

Payout occurs when total AT cashflow equals investment
See graph below, note years when cashflow reaches zero

Payout = NEVER Years or #VALUE! Days


Gross Reserves:

Oil Reserves = 6 BO
Gas Reserves = 0 MCF
Gas Equiv Reserves = 38 MCFE

Notes/Assumptions:

An average NBU well produces 0.192 Bcpd with no tank pressure. The production is increased to 0.194 Bcpd if 4 ozs of pressure are placed on the tank. The increased production does not payout the valve cost or the estimated annual maintenance costs.

Project: Condensate Shrinkage Economics

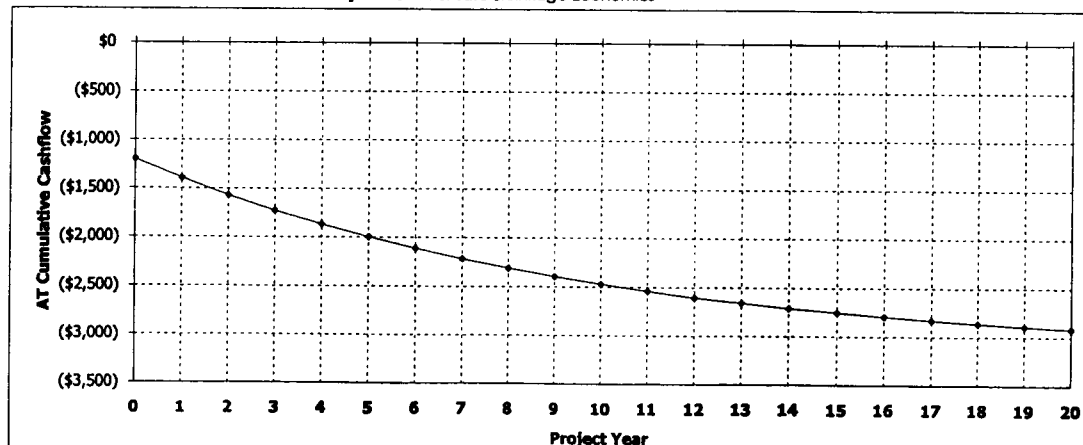

Westport Oil and Gas, Inc.

NBU/Ouray Field

RFL 2003-022

COMPARISON OF FLASH BACK PRESSURES

Calculated by Characterized Equation-of-State

Flash Conditions		Gas/Oil Ratio (scf/STbbl) (A)	Specific Gravity of Flashed Gas (Air=1.000)	Separator Volume Factor (B)	Separator Volume Percent (C)
psig	°F				

Calculated at Laboratory Flash Conditions

80	70			1.019	
0	122	30.4	0.993	1.033	101.37%
0	60	0.0	—	1.000	98.14%

Calculated Flash with Backpressure using Tuned EOS

80	70			1.015	
6.0 oz	65	24.6	0.777	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
4.0 oz	65	24.7	0.778	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
2.0 oz	65	24.7	0.779	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
0	65	24.8	0.780	1.003	98.82%
0	60	0.0	—	1.000	98.52%

(A) Cubic Feet of gas at 14.696 psia and 60 °F per Barrel of Stock Tank Oil at 60 °F.

(B) Barrels of oil at indicated pressure and temperature per Barrel of Stock Tank Oil at 60 °F.

(C) Oil volume at indicated pressure and temperature as a percentage of original saturated oil volume.

Note: Bubblepoint of sample in original sample container was 80 psig at 70° F with 1 cc water

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ
 2. CDW

X Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:		1/6/2006	
FROM: (Old Operator): N2115-Westport Oil & Gas Co., LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024		TO: (New Operator): N2995-Kerr-McGee Oil & Gas Onshore, LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	
CA No.		Unit:	
		NATURAL BUTTES UNIT	
WELL NAME	SEC TWN RNG	API NO	ENTITY NO
			LEASE TYPE
			WELL TYPE
			WELL STATUS

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
3. The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- 4a. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- 4b. If **NO**, the operator was contacted on: _____
- 5a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- 5b. Inspections of LA PA state/fee well sites complete on: n/a 3 LA wells & all PA wells transferred
- 5c. Reports current for Production/Disposition & Sundries on: ok
6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet
7. **Federal and Indian Units:**
 The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006
8. **Federal and Indian Communization Agreements ("CA"):**
 The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, Transfer of Authority to Inject, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 5/15/2006
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
3. Bond information entered in RBDMS on: 5/15/2006
4. Fee/State wells attached to bond in RBDMS on: 5/16/2006
5. Injection Projects to new operator in RBDMS on: _____
6. Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: CO1203
2. Indian well(s) covered by Bond Number: RLB0005239
3. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- a. The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG
- The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

4. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

KERR-McGEE OIL & GAS ONSHORE LP

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

5. Lease Serial No.

MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment Notice

☐ Acidize

☐ Alter Casing

☐ Casing Repair

☐ Change Plans

☐ Convert to Injection

☐ Deepen

☐ Fracture Treat

☐ New Construction

☐ Plug and Abandon

☐ Plug Back

☐ Production (Start/Resume)

☐ Reclamation

☐ Recomplete

☐ Temporarily Abandon

☐ Water Disposal

☐ Water Shut-Off

☐ Well Integrity

☒ Other CHANGE OF OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006.

KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

RECEIVED

MAY 10 2006

DIV. OF OIL, GAS & MINING

BLM BOND = C01203

BIA BOND = RLB0005239

APPROVED 5/16/06

Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

RANDY BAYNE

Title

DRILLING MANAGER

Signature

Date

May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

5. Lease Serial No.

MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

WESTPORT OIL & GAS COMPANY L.P.

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment Notice

☐ Acidize

☐ Alter Casing

☐ Casing Repair

☐ Change Plans

☐ Convert to Injection

☐ Deepen

☐ Fracture Treat

☐ New Construction

☐ Plug and Abandon

☐ Plug Back

☐ Production (Start/Resume)

☐ Reclamation

☐ Recomplete

☐ Temporarily Abandon

☐ Water Disposal

☐ Water Shut-Off

☐ Well Integrity

☒ Other CHANGE OF
OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

APPROVED 5/16/06

Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

RECEIVED

MAY 10 2006

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

BRAD LANEY

Signature

Title

ENGINEERING SPECIALIST

Date

May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Brad Laney

Title

Office

Date

5-9-06

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Colorado State Office
2850 Youngfield Street
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)
3106
COC017387 et. al.

March 23, 2006

NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :
1999 Broadway, Suite 3700 : Oil & Gas
Denver, CO 80202 :

Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell
Martha L. Maxwell
Land Law Examiner
Fluid Minerals Adjudication

Attachment:

List of OG Leases to each of the following offices:

MMS MRM, MS 357B-1

WY, UT, NM/OK/TX, MT/ND, WY State Offices

CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357

Rider #2 to Bond WY1865

Rider #3 to Bond WY1127



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155
<http://www.blm.gov>



IN REPLY REFER TO:
3106
(UT-922)

March 27, 2006

Memorandum

To: Vernal Field Office

From: Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of
Fluid Minerals

Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114
Teresa Thompson
Joe Incardine
Connie Seare
Dave Mascarenas
Susan Bauman

RECEIVED

MAR 28 2006

U.S. OFCIL, CAC 2 1111 13

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-3282
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 124
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0435 FNL 2295 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNE Section: 16 Township: 09.0S Range: 21.0E Meridian: S		9. API NUMBER: 43047319710000
9. FIELD and POOL or WILDCAT: NATURAL BUTTES		COUNTY: UINTAH
STATE: UTAH		
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE <input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 9/14/2011 <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> DRILLING REPORT Report Date: <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> APD EXTENSION <input type="checkbox"/> WILDCAT WELL DETERMINATION <input checked="" type="checkbox"/> OTHER OTHER: PRODUCTION ACCOU	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. 4304731957 NBU 104 SENW 16 T9S R21E is located on Federal lease UTU 038409 which covers the NW/4 of Section 16-9S-21E; 4304731971 NBU 124 NWNE 16 T9S R21E is located on State Lease ML 3282 which covers the NE/4, N/2SE/4, SW/4SE/4 of Sec 16-9S-21E. Both the NBU 104 and the NBU 124 are unit wells under the Natural Buttes Unit Wasatch/Mesaverde participating area (UTU 63047A). All of the committed royalty owners in the unit share in production from these two wells. The State of Utah and the MMS are the largest royalty owners in the wells: State of Utah .03287388 Department of the Interior MMS .09186775		
NAME (PLEASE PRINT) Sheila Wopsock	PHONE NUMBER 435 781-7024	TITLE Regulatory Analyst
SIGNATURE N/A	DATE 9/15/2011	